

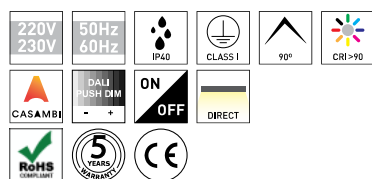
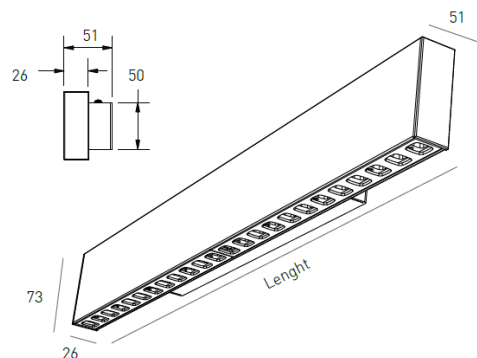
DESCRIPTION

The luminaire Oris SlimPro Wall is a complement to the Oris SlimPro range. The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive and a good choice for wall application in refined spaces, where lighting is discreet, but efficient and with a high CRI.

MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Silver, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 201 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

TECHNICAL DRAWING

ORIS OPAL + OPAL WALL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	21.5	TB, TS, TW	CS, DA, NF	90	4204	2943	3000K	5297XX.0509.930.FI
570	21.5	TB, TS, TW	CS, DA, NF	90	4311	3018	4000K	5297XX.0509.940.FI
850	32.2	TB, TS, TW	CS, DA, NF	90	6306	4414	3000K	5297XX.0809.930.FI
850	32.2	TB, TS, TW	CS, DA, NF	90	6467	4527	4000K	5297XX.0809.940.FI
1130	42.9	TB, TS, TW	CS, DA, NF	90	8408	5886	3000K	5297XX.1109.930.FI
1130	42.9	TB, TS, TW	CS, DA, NF	90	8623	6036	4000K	5297XX.1109.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	90°	90
DALI / Switch Dim	DA	Textured Silver	TS		
ON/OFF	NF	Textured White	TW		