

**DESCRIPTION**

The luminaire Oris SlimPro Wall is a complement to the Oris SlimPro range. The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive and a good choice for wall application in refined spaces, where lighting is discreet, but efficient and with a high CRI.


<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF




**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 201 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

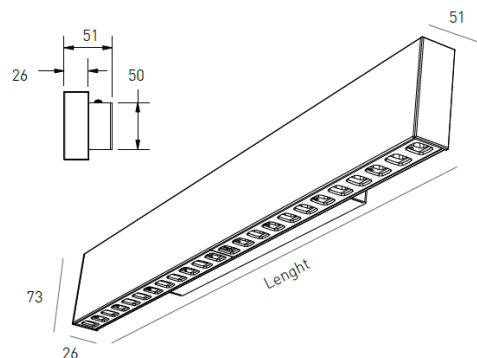

**ICONOGRAPHY**

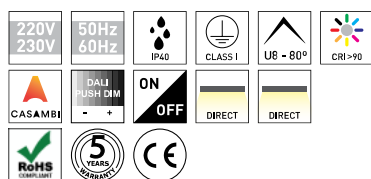

**ORIS PRISMATIC WALL  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	10.7	TB, TS, TW	CS, DA, NF	80	2102	1829	3000K	5295XX.05P8.930.FI
570	10.7	TB, TS, TW	CS, DA, NF	80	2156	1875	4000K	5295XX.05P8.940.FI
850	16.1	TB, TS, TW	CS, DA, NF	80	3153	2743	3000K	5295XX.08P8.930.FI
850	16.1	TB, TS, TW	CS, DA, NF	80	3234	2813	4000K	5295XX.08P8.940.FI
1130	21.5	TB, TS, TW	CS, DA, NF	80	4204	3658	3000K	5295XX.11P8.930.FI
1130	21.5	TB, TS, TW	CS, DA, NF	80	4311	3751	4000K	5295XX.11P8.940.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	80°	80
DALI / Switch Dim	DA	Textured Silver	TS		
ON/OFF	NF	Textured White	TW		