

DESCRIPTION

Oris SlimPro The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive. With a minimalist design, this light fixture was designed for refined spaces, where lighting is discreet, but efficient and with a high CRI. Oris SlimPro has the options of direct/indirect light, opal and prismatic diffuser, different beam angles, low glare reflectors and lenses, and comes in versions adaptable for ceilings, surface or walls. Specially developed to meet the requirements of architects, who are looking for thin and modular lighting fixtures. With SlimPro, it's possible to mount slim lines of light up to 3,375m without the need of joints. A selection of finishing colours starting from white, black to silver. The LED profiles come as well with the options to be configured in ON-OFF, DALI or CASAMBI.


|                    |   |
|--------------------|---|
| MOUNTING           | Surface   |
| LIGHT DISTRIBUTION | Directa   |
| POWER SUPPLY       | 220-230V / 50-60 Hz                             |
| WARRANTY           | 5 Years   |
| FINISHING          | Textured Black, Textured Silver, Textured White |
| CONTROL            | DALI / PUSH Dim, ON/OFF                         |




TECHNICAL DRAWING

LED FEATURES

|                      |                 |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY  | UP TO 195 lm/W  |
| CRI                  | CRI→90          |
| LIFESPAN             | 50.000 Hours    |
| STEPS MACADAM        | 3 Steps MacAdam |
| LUMEN MAINTENANCE    | L90/B50         |
| PHOTOBIOLOGICAL RISK | RG1             |

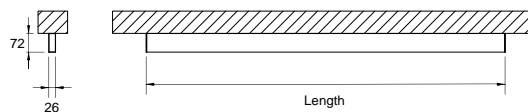

ICONOGRAPHY

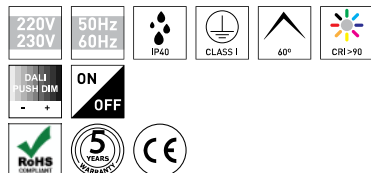

ORIS SLIM PRO LOW GLARE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| LENGTH | POWER | FINISHING  | COLOR TEMP. | CONTROLTYPE | LED LUMENS | LUMINAIRE LM | CODE               |
|--------|-------|------------|-------------|-------------|------------|--------------|--------------------|
| 570    | 7,8   | TB, TS, TW | 3000K       | DA, NF      | 1482       | 1305         | 5247XX.05U6.930.FI |
| 570    | 7,8   | TB, TS, TW | 4000K       | DA, NF      | 1529       | 1347         | 5247XX.05U6.940.FI |
| 850    | 11,8  | TB, TS, TW | 3000K       | DA, NF      | 2223       | 1958         | 5247XX.08U6.930.FI |
| 850    | 11,8  | TB, TS, TW | 4000K       | DA, NF      | 2293       | 2020         | 5247XX.08U6.940.FI |
| 1130   | 15,7  | TB, TS, TW | 3000K       | DA, NF      | 2964       | 2611         | 5247XX.11U6.930.FI |
| 1130   | 15,7  | TB, TS, TW | 4000K       | DA, NF      | 3058       | 2694         | 5247XX.11U6.940.FI |
| 1410   | 19,6  | TB, TS, TW | 3000K       | DA, NF      | 3704       | 3264         | 5247XX.14U6.930.FI |
| 1410   | 19,6  | TB, TS, TW | 4000K       | DA, NF      | 3822       | 3367         | 5247XX.14U6.940.FI |
| 1690   | 23,5  | TB, TS, TW | 3000K       | DA, NF      | 4445       | 3916         | 5247XX.16U6.930.FI |
| 1690   | 23,5  | TB, TS, TW | 4000K       | DA, NF      | 4586       | 4041         | 5247XX.16U6.940.FI |
| 1970   | 27,4  | TB, TS, TW | 3000K       | DA, NF      | 5186       | 4569         | 5247XX.19U6.930.FI |
| 1970   | 27,4  | TB, TS, TW | 4000K       | DA, NF      | 5351       | 4714         | 5247XX.19U6.940.FI |
| 2250   | 31,4  | TB, TS, TW | 3000K       | DA, NF      | 5927       | 5222         | 5247XX.22U6.930.FI |
| 2250   | 31,4  | TB, TS, TW | 4000K       | DA, NF      | 6115       | 5387         | 5247XX.22U6.940.FI |
| 2530   | 35,3  | TB, TS, TW | 3000K       | DA, NF      | 6668       | 5874         | 5247XX.25U6.930.FI |
| 2530   | 35,3  | TB, TS, TW | 4000K       | DA, NF      | 6880       | 6061         | 5247XX.25U6.940.FI |
| 2810   | 39,2  | TB, TS, TW | 3000K       | DA, NF      | 7409       | 6527         | 5247XX.28U6.930.FI |
| 2810   | 39,2  | TB, TS, TW | 4000K       | DA, NF      | 7644       | 6734         | 5247XX.28U6.940.FI |
| 3090   | 43,1  | TB, TS, TW | 3000K       | DA, NF      | 8150       | 7180         | 5247XX.30U6.930.FI |
| 3090   | 43,1  | TB, TS, TW | 4000K       | DA, NF      | 8408       | 7408         | 5247XX.30U6.940.FI |
| 3370   | 47    | TB, TS, TW | 3000K       | DA, NF      | 8891       | 7833         | 5247XX.33U6.930.FI |
| 3370   | 47    | TB, TS, TW | 4000K       | DA, NF      | 9173       | 8081         | 5247XX.33U6.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROLTYPE     | XX | COLOR TEMP. | CT | FINISHING       | FI |
|-----------------|----|-------------|----|-----------------|----|
| DALI / PUSH Dim | DA | 3000K       | 30 | Textured Black  | TB |
| ON/OFF          | NF | 4000K       | 40 | Textured Silver | TS |
|                 |    |             |    | Textured White  | TW |

ACCESSORIES

