


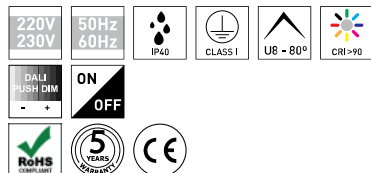
**DESCRIPTION**

Oris SlimPro The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive. With a minimalist design, this light fixture was designed for refined spaces, where lighting is discreet, but efficient and with a high CRI. Oris SlimPro has the options of direct/indirect light, opal and prismatic diffuser, different beam angles, low glare reflectors and lenses, and comes in versions adaptable for ceilings, surface or walls. Specially developed to meet the requirements of architects, who are looking for thin and modular lighting fixtures. With SlimPro, it's possible to mount slim lines of light up to 3,375m without the need of joints. A selection of finishing colours starting from white, black to silver. The LED profiles come as well with the options to be configured in ON-OFF, DALI or CASAMBI.

<b>MOUNTING</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / PUSH Dim, ON/OFF


**TECHNICAL DRAWING**
**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 201 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**ICONOGRAPHY**

**ORIS SLIM PRO PRISMATIC  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
570	10,7	TB, TS, TW	3000K	DA, NF	2102	1829	5241XX.05P8.930.FI
570	10,7	TB, TS, TW	4000K	DA, NF	2156	1875	5241XX.05P8.940.FI
850	16,1	TB, TS, TW	3000K	DA, NF	3153	2743	5241XX.08P8.930.FI
850	16,1	TB, TS, TW	4000K	DA, NF	3234	2813	5241XX.08P8.940.FI
1130	21,5	TB, TS, TW	3000K	DA, NF	4204	3658	5241XX.11P8.930.FI
1130	21,5	TB, TS, TW	4000K	DA, NF	4311	3751	5241XX.11P8.940.FI
1410	26,8	TB, TS, TW	3000K	DA, NF	5255	4572	5241XX.14P8.930.FI
1410	26,8	TB, TS, TW	4000K	DA, NF	5389	4689	5241XX.14P8.940.FI
1690	32,2	TB, TS, TW	3000K	DA, NF	6306	5486	5241XX.16P8.930.FI
1690	32,2	TB, TS, TW	4000K	DA, NF	6467	5626	5241XX.16P8.940.FI
1970	37,5	TB, TS, TW	3000K	DA, NF	7357	6401	5241XX.19P8.930.FI
1970	37,5	TB, TS, TW	4000K	DA, NF	7545	6564	5241XX.19P8.940.FI
2250	42,9	TB, TS, TW	3000K	DA, NF	8408	7315	5241XX.22P8.930.FI
2250	42,9	TB, TS, TW	4000K	DA, NF	8623	7502	5241XX.22P8.940.FI
2530	48,3	TB, TS, TW	3000K	DA, NF	9459	8230	5241XX.25P8.930.FI
2530	48,3	TB, TS, TW	4000K	DA, NF	9701	8440	5241XX.25P8.940.FI
2810	53,6	TB, TS, TW	3000K	DA, NF	10511	9144	5241XX.28P8.930.FI
2810	53,6	TB, TS, TW	4000K	DA, NF	10779	9377	5241XX.28P8.940.FI
3090	59	TB, TS, TW	3000K	DA, NF	11562	10059	5241XX.30P8.930.FI
3090	59	TB, TS, TW	4000K	DA, NF	11856	10315	5241XX.30P8.940.FI
3370	64,4	TB, TS, TW	3000K	DA, NF	12613	10973	5241XX.33P8.930.FI
3370	64,4	TB, TS, TW	4000K	DA, NF	12934	11253	5241XX.33P8.940.FI

 SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**


CASAMBI - DALI Interface  
CASAMBI - DALI Interface  
CASAMBI  
8030-2590

