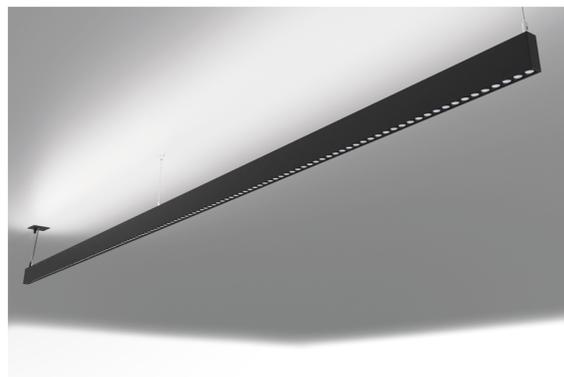


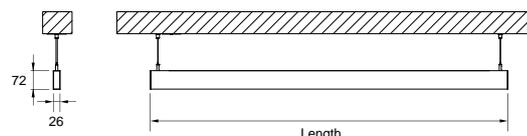
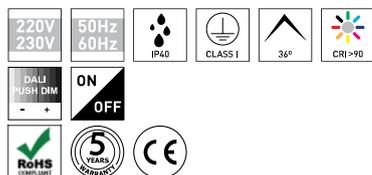
**DESCRIPTION**

Oris SlimPro Direct and Indirect Light With this version of the ORIS SLIM PRO, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

<b>MOUNTING TYPE</b>	Surface, Suspension
<b>LIGHT DISTRIBUTION</b>	Directa e indirecta, direta e indirecta
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 152 lm/W
<b>CRI</b>	CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS SLIM PRO LENS 30 D/I**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	20	TB, TS, TW	3000K	DA, NF	2868	2441	246XX.11L3.930.FI
1130	20	TB, TS, TW	4000K	DA, NF	3013	2564	246XX.11L3.940.FI
1410	25.4	TB, TS, TW	3000K	DA, NF	3650	3095	246XX.14L3.930.FI
1410	25.4	TB, TS, TW	4000K	DA, NF	3834	3251	246XX.14L3.940.FI
1690	30.8	TB, TS, TW	3000K	DA, NF	4432	3749	246XX.16L3.930.FI
1690	30.8	TB, TS, TW	4000K	DA, NF	4656	3938	246XX.16L3.940.FI
2255	41.6	TB, TS, TW	3000K	DA, NF	5996	5057	246XX.22L3.930.FI
2255	41.6	TB, TS, TW	4000K	DA, NF	6299	5312	246XX.22L3.940.FI
2815	52.5	TB, TS, TW	3000K	DA, NF	7560	6366	246XX.28L3.930.FI
2815	52.5	TB, TS, TW	4000K	DA, NF	7941	6687	246XX.28L3.940.FI
3375	63.3	TB, TS, TW	3000K	DA, NF	9124	7675	246XX.33L3.930.FI
3375	63.3	TB, TS, TW	4000K	DA, NF	9584	8062	246XX.33L3.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b> Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	<b>Silver</b> 80303017.SL 80303018.SL 80303019.SL		
	<b>Ceiling Rose Recessed</b> Ceiling Rose Recessed	Textured White 80303020.TW	Textured Silver 80303020.TS	Textured Black 80303020.TB
	<b>Ceiling Rose Surface</b> Ceiling Rose Surface	Textured White 80303021.TW	Textured Silver 80303021.TS	Textured Black 80303021.TB
	<b>Power Cable 0,75</b>	<b>ON/OFF</b>	<b>DALI Push</b>	



Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

80303001  
80303002  
80303003

80303004  
80303005  
80303006



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Lens

