

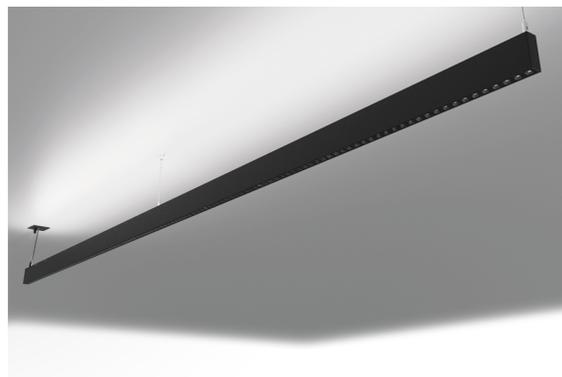
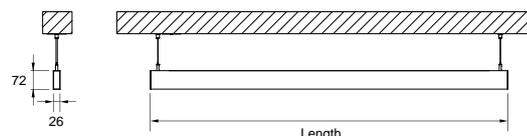
**DESCRIPTION**

Oris SlimPro Direct and Indirect Light With this version of the ORIS SLIM PRO, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 199 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS SLIM PRO L.GLARE D/I**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	20.8	TB, TS, TW	3000K	DA, NF	4018	3349	5246XX.11U6.930.FI
1130	20.8	TB, TS, TW	4000K	DA, NF	4148	3457	5246XX.11U6.940.FI
1410	26.5	TB, TS, TW	3000K	DA, NF	5110	4247	5246XX.14U6.930.FI
1410	26.5	TB, TS, TW	4000K	DA, NF	5276	4385	5246XX.14U6.940.FI
1690	32.1	TB, TS, TW	3000K	DA, NF	6202	5146	5246XX.16U6.930.FI
1690	32.1	TB, TS, TW	4000K	DA, NF	6404	5313	5246XX.16U6.940.FI
1970	37.8	TB, TS, TW	3000K	DA, NF	7295	6045	5246XX.19U6.930.FI
1970	37.8	TB, TS, TW	4000K	DA, NF	7531	6241	5246XX.19U6.940.FI
2250	41.7	TB, TS, TW	3000K	DA, NF	8035	6698	5246XX.22U6.930.FI
2250	41.7	TB, TS, TW	4000K	DA, NF	8296	6914	5246XX.22U6.940.FI
2530	45.6	TB, TS, TW	3000K	DA, NF	8776	7350	5246XX.25U6.930.FI
2530	45.6	TB, TS, TW	4000K	DA, NF	9060	7587	5246XX.25U6.940.FI
2810	53	TB, TS, TW	3000K	DA, NF	10220	8495	5246XX.28U6.930.FI
2810	53	TB, TS, TW	4000K	DA, NF	10552	8770	5246XX.28U6.940.FI
3090	56.9	TB, TS, TW	3000K	DA, NF	10961	9148	5246XX.30U6.930.FI
3090	56.9	TB, TS, TW	4000K	DA, NF	11316	9443	5246XX.30U6.940.FI
3370	64.3	TB, TS, TW	3000K	DA, NF	12404	10292	5246XX.33U6.930.FI
3370	64.3	TB, TS, TW	4000K	DA, NF	12807	10625	5246XX.33U6.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**

	<b>Suspension Kit</b>	Silver		
	Suspension kit 1,5m (1un)	80303017.SL		
	Suspension kit 3 m (1un)	80303018.SL		
	Suspension kit 5 m (1un)	80303019.SL		
	<b>Ceiling Rose Recessed</b>	Textured White	Textured Silver	Textured Black
	Ceiling Rose Recessed	80303020.TW	80303020.TS	80303020.TB
	<b>Ceiling Rose Surface</b>	Textured White	Textured Silver	Textured Black
	Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB



Power Cable 0,75  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

ON/Off	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590