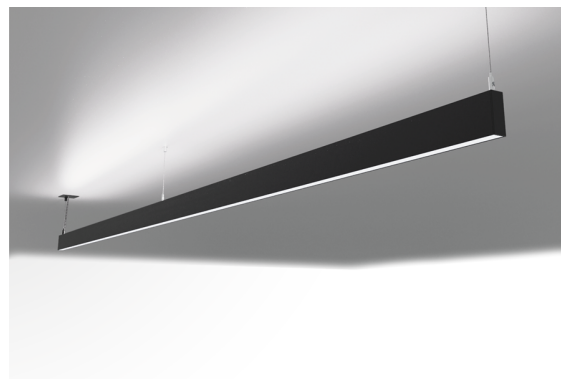


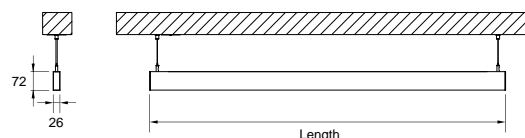
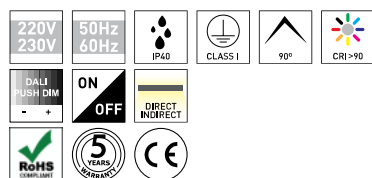
DESCRIPTION

Oris SlimPro Direct and Indirect Light With this version of the ORIS SLIM PRO, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

MOUNTING TYPE	Surface, Suspension, Suspenso
LIGHT DISTRIBUTION	Direct and Indirect, direta e indireta
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured Silver, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 158 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

ORIS SLIM PRO OPAL D/I
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	25.3	TB, TS, TW	3000K	DA, NF	3776	2551	244XX.1109.930.FI
1130	25.3	TB, TS, TW	4000K	DA, NF	3971	2683	244XX.1109.940.FI
1410	32	TB, TS, TW	3000K	DA, NF	4784	3233	244XX.1409.930.FI
1410	32	TB, TS, TW	4000K	DA, NF	5031	3400	244XX.1409.940.FI
1690	38.7	TB, TS, TW	3000K	DA, NF	5793	3914	244XX.1609.930.FI
1690	38.7	TB, TS, TW	4000K	DA, NF	6092	4116	244XX.1609.940.FI
2255	52.2	TB, TS, TW	3000K	DA, NF	7811	5243	244XX.2209.930.FI
2255	52.2	TB, TS, TW	4000K	DA, NF	8214	5513	244XX.2209.940.FI
2815	65.6	TB, TS, TW	3000K	DA, NF	9828	6641	244XX.2809.930.FI
2815	65.6	TB, TS, TW	4000K	DA, NF	10335	6984	244XX.2809.940.FI
3375	79	TB, TS, TW	3000K	DA, NF	11846	8004	244XX.3309.930.FI
3375	79	TB, TS, TW	4000K	DA, NF	12457	8417	244XX.3309.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

ACCESSORIES

	Suspension Kit	Silver		Textured White	Textured Silver	Textured Black
	Suspension kit 1,5m (1un)	80303017.SL				
	Suspension kit 3 m (1un)	80303018.SL				
	Suspension kit 5 m (1un)	80303019.SL				
	Ceiling Rose Recessed	80303020.TW	80303020.TS	80303020.TB		
	Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB		
	Power Cable 0,75	ON/Off	Dim Control			



Clear Power Cable 3m	80303002	
Power Cable 1.5m	80303001	80303004
Power Cable 3m	80303005	
Power Cable 5m	80303003	80303006



CASAMBI - DALI Interface	CASAMBI
CASAMBI - DALI Interface	8030-2590

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS OPAL

