

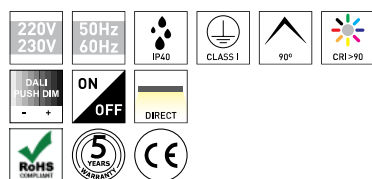
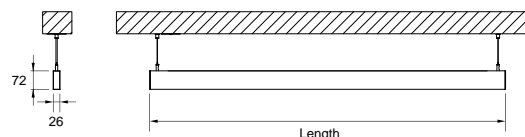
DESCRIPTION

Oris SlimPro Direct and Indirect Light With this version of the ORIS SLIM PRO, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Silver, Textured White
CONTROL	DALI / Switch Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 203 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

TECHNICAL DRAWING

ORIS SLIM PRO OPAL D/I
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	26.6	TB, TS, TW	3000K	DA, NF	5258	3681	5244XX.1109.930.FI
1130	26.6	TB, TS, TW	4000K	DA, NF	5402	3781	5244XX.1109.940.FI
1410	33.7	TB, TS, TW	3000K	DA, NF	6661	4663	5244XX.1409.930.FI
1410	33.7	TB, TS, TW	4000K	DA, NF	6843	4790	5244XX.1409.940.FI
1690	40.8	TB, TS, TW	3000K	DA, NF	8063	5644	5244XX.1609.930.FI
1690	40.8	TB, TS, TW	4000K	DA, NF	8284	5799	5244XX.1609.940.FI
1970	47.9	TB, TS, TW	3000K	DA, NF	9466	6626	5244XX.1909.930.FI
1970	47.9	TB, TS, TW	4000K	DA, NF	9726	6808	5244XX.1909.940.FI
2250	53.2	TB, TS, TW	3000K	DA, NF	10517	7362	5244XX.2209.930.FI
2250	53.2	TB, TS, TW	4000K	DA, NF	10804	7563	5244XX.2209.940.FI
2530	58.6	TB, TS, TW	3000K	DA, NF	11568	8097	5244XX.2509.930.FI
2530	58.6	TB, TS, TW	4000K	DA, NF	11881	8317	5244XX.2509.940.FI
2810	67.4	TB, TS, TW	3000K	DA, NF	13322	9325	5244XX.2809.930.FI
2810	67.4	TB, TS, TW	4000K	DA, NF	13686	9580	5244XX.2809.940.FI
3090	72.8	TB, TS, TW	3000K	DA, NF	14373	10061	5244XX.3009.930.FI
3090	72.8	TB, TS, TW	4000K	DA, NF	14764	10335	5244XX.3009.940.FI
3370	81.6	TB, TS, TW	3000K	DA, NF	16127	11289	5244XX.3309.930.FI
3370	81.6	TB, TS, TW	4000K	DA, NF	16569	11598	5244XX.3309.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

ACCESSORIES

Suspension Kit	Silver			
Suspension kit 1,5m (1un)	80303017.SL			
Suspension kit 3 m (1un)	80303018.SL			
Suspension kit 5 m (1un)	80303019.SL			
Ceiling Rose Recessed	Textured White	Textured Silver	Textured Black	
Ceiling Rose Recessed	80303020.TW	80303020.TS	80303020.TB	
Ceiling Rose Surface	Textured White	Textured Silver	Textured Black	
Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB	
Power Cable 0,75	ON/Off	DALI Push		
Power Cable 1.5m	80303001	80303004		
Power Cable 3m	80303002	80303005		
Power Cable 5m	80303003	80303006		
CASAMBI - DALI Interface	CASAMBI			
CASAMBI - DALI Interface	8030-2590			