

**DESCRIPTION**

Oris SlimPro Direct and Indirect Light With this version of the ORIS SLIM PRO, it is possible to obtain reduced size light lines while spreading simultaneously direct and indirect light (D / I), thus offering greater freedom for those who design the lighting for a space.

<b>MOUNTING</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / PUSH Dim, ON/OFF




**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 203 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**



**ICONOGRAPHY**

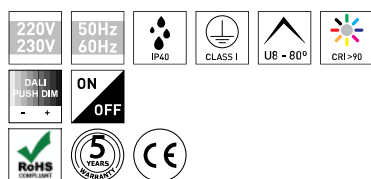

**ORIS SLIM PRO PRIS. D/I  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	26,6	TB, TS, TW	3000K	DA, NF	5258	4396	5244XX.11P8.930.FI
1130	26,6	TB, TS, TW	4000K	DA, NF	5402	4514	5244XX.11P8.940.FI
1410	33,7	TB, TS, TW	3000K	DA, NF	6661	5556	5244XX.14P8.930.FI
1410	33,7	TB, TS, TW	4000K	DA, NF	6843	5706	5244XX.14P8.940.FI
1690	40,8	TB, TS, TW	3000K	DA, NF	8063	6716	5244XX.16P8.930.FI
1690	40,8	TB, TS, TW	4000K	DA, NF	8284	6899	5244XX.16P8.940.FI
1970	47,9	TB, TS, TW	3000K	DA, NF	9466	7877	5244XX.19P8.930.FI
1970	47,9	TB, TS, TW	4000K	DA, NF	9726	8091	5244XX.19P8.940.FI
2250	53,2	TB, TS, TW	3000K	DA, NF	10517	8791	5244XX.22P8.930.FI
2250	53,2	TB, TS, TW	4000K	DA, NF	10804	9028	5244XX.22P8.940.FI
2530	58,6	TB, TS, TW	3000K	DA, NF	11568	9706	5244XX.25P8.930.FI
2530	58,6	TB, TS, TW	4000K	DA, NF	11881	9966	5244XX.25P8.940.FI
2810	67,4	TB, TS, TW	3000K	DA, NF	13322	11112	5244XX.28P8.930.FI
2810	67,4	TB, TS, TW	4000K	DA, NF	13686	11413	5244XX.28P8.940.FI
3090	72,8	TB, TS, TW	3000K	DA, NF	14373	12026	5244XX.30P8.930.FI
3090	72,8	TB, TS, TW	4000K	DA, NF	14764	12350	5244XX.30P8.940.FI
3370	81,6	TB, TS, TW	3000K	DA, NF	16127	13433	5244XX.33P8.930.FI
3370	81,6	TB, TS, TW	4000K	DA, NF	16569	13797	5244XX.33P8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**

	Suspension Kit	Silver		
	Suspension kit 1,5m (1un)	80303017.SL		
	Suspension kit 3 m (1un)	80303018.SL		
	Suspension kit 5 m (1un)	80303019.SL		
	Ceiling Rose Recessed	Textured White	Textured Silver	Textured Black
	Ceiling Rose Recessed	80303020.TW	80303020.TS	80303020.TB
	Ceiling Rose Surface	Textured White	Textured Silver	Textured Black
	Ceiling Rose Surface	80303021.TW	80303021.TS	80303021.TB



Clear Power Cable  
Power Cable 1.5m  
Power Cable 3m  
Power Cable 5m

ON/OFF	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006



CASAMBI - DALI Interface  
CASAMBI - DALI Interface

CASAMBI  
8030-2590