



DESCRIPTION

Oris SlimPro The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive. With a minimalist design, this light fixture was designed for refined spaces, where lighting is discreet, but efficient and with a high CRI. Oris SlimPro has the options of direct/indirect light, opal and prismatic diffuser, different beam angles, low glare reflectors and lenses, and comes in versions adaptable for ceilings, surface or walls. Specially developed to meet the requirements of architects, who are looking for thin and modular lighting fixtures. With SlimPro, it's possible to mount slim lines of light up to 3,375m without the need of joints. A selection of finishing colours starting from white, black to silver. The LED profiles come as well with the options to be configured in ON-OFF, DALI or CASAMBI.

MOUNTING TYPE	Surface, Suspension
LIGHT DISTRIBUTION	Direct, Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured Silver, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


TECHNICAL DRAWING
LED FEATURES

LUMINOUS EFFICIENCY	UP TO 145 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

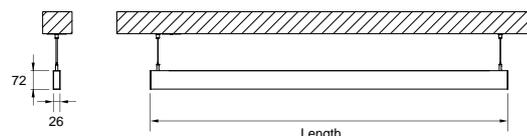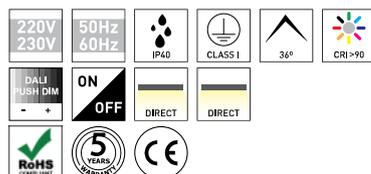
ICONOGRAPHY

ORIS SLIM PRO LENS 30
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
570	7.6	TB, TS, TW	3000K	DA, NF	1044	958	242XX.05L3.930.FI
570	7.6	TB, TS, TW	4000K	DA, NF	1097	1006	242XX.05L3.940.FI
850	11.4	TB, TS, TW	3000K	DA, NF	1566	1435	242XX.08L3.930.FI
850	11.4	TB, TS, TW	4000K	DA, NF	1646	1508	242XX.08L3.940.FI
1130	15.2	TB, TS, TW	3000K	DA, NF	2088	1914	242XX.11L3.930.FI
1130	15.2	TB, TS, TW	4000K	DA, NF	2194	2011	242XX.11L3.940.FI
1410	19	TB, TS, TW	3000K	DA, NF	2610	2392	242XX.14L3.930.FI
1410	19	TB, TS, TW	4000K	DA, NF	2742	2513	242XX.14L3.940.FI
1690	22.8	TB, TS, TW	3000K	DA, NF	3132	2870	242XX.16L3.930.FI
1690	22.8	TB, TS, TW	4000K	DA, NF	3291	3015	242XX.16L3.940.FI
1970	26.6	TB, TS, TW	3000K	DA, NF	3654	3348	242XX.19L3.930.FI
1970	26.6	TB, TS, TW	4000K	DA, NF	3839	3517	242XX.19L3.940.FI
2255	30.4	TB, TS, TW	3000K	DA, NF	4176	3827	242XX.22L3.930.FI
2255	30.4	TB, TS, TW	4000K	DA, NF	4388	4021	242XX.22L3.940.FI
2535	34.1	TB, TS, TW	3000K	DA, NF	4698	4308	242XX.25L3.930.FI
2535	34.1	TB, TS, TW	4000K	DA, NF	4936	4526	242XX.25L3.940.FI
2815	37.9	TB, TS, TW	3000K	DA, NF	5220	4785	242XX.28L3.930.FI
2815	37.9	TB, TS, TW	4000K	DA, NF	5484	5027	242XX.28L3.940.FI
3095	41.7	TB, TS, TW	3000K	DA, NF	5742	5261	242XX.30L3.930.FI
3095	41.7	TB, TS, TW	4000K	DA, NF	6033	5527	242XX.30L3.940.FI
3375	45.5	TB, TS, TW	3000K	DA, NF	6264	5742	242XX.33L3.930.FI
3375	45.5	TB, TS, TW	4000K	DA, NF	6581	6032	242XX.33L3.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

ACCESSORIES


Suspension Kit	Silver
Suspension kit 1,5m (1un)	80303017.SL
Suspension kit 3 m (1un)	80303018.SL

Suspension kit 5 m (1un)

80303019.SL



Ceiling Rose Recessed
Ceiling Rose Recessed

Textured White	Textured Silver	Textured Black
80303020.TW	80303020.TS	80303020.TB



Ceiling Rose Surface
Ceiling Rose Surface

Textured White	Textured Silver	Textured Black
80303021.TW	80303021.TS	80303021.TB



Power Cable 0,75
Power Cable 1.5m
Power Cable 3m
Power Cable 5m

ON/OFF	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006




CASAMBI - DALI Interface
CASAMBI - DALI Interface

CASAMBI
8030-2590


PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Lens

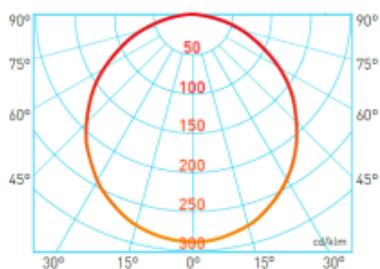


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

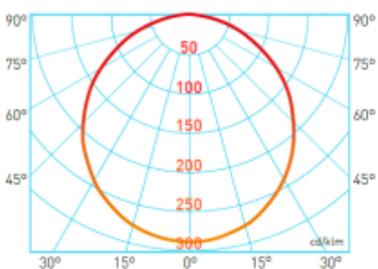


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

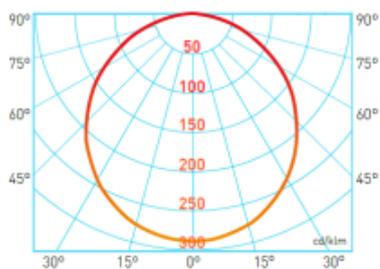


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

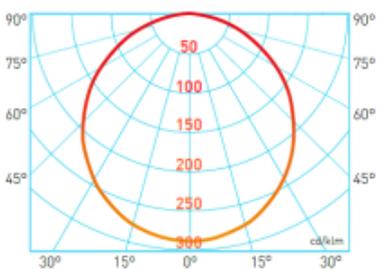


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

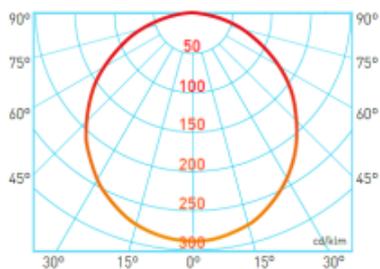


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

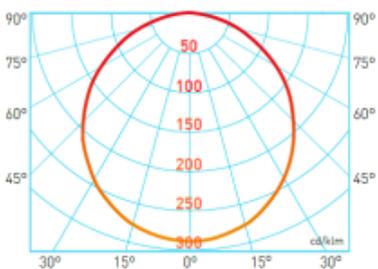


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

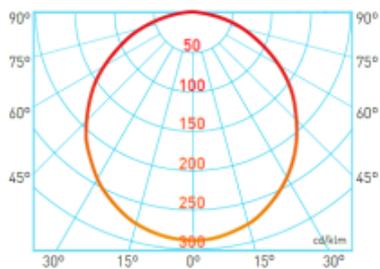


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

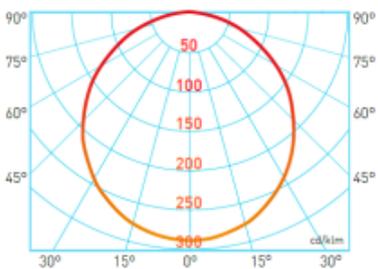


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

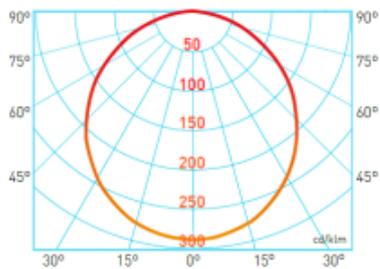


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

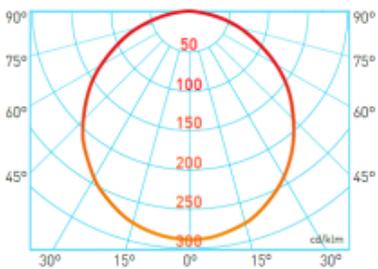

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

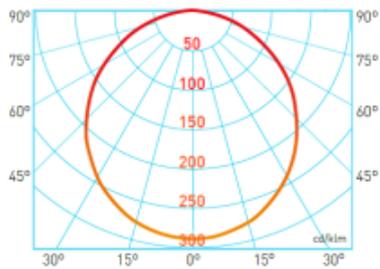

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM