

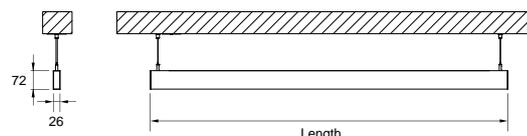
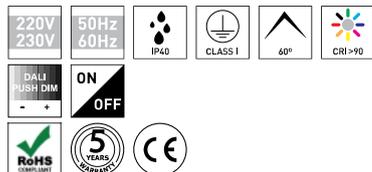
**DESCRIPTION**

Oris SlimPro The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive. With a minimalist design, this light fixture was designed for refined spaces, where lighting is discreet, but efficient and with a high CRI. Oris SlimPro has the options of direct/indirect light, opal and prismatic diffuser, different beam angles, low glare reflectors and lenses, and comes in versions adaptable for ceilings, surface or walls. Specially developed to meet the requirements of architects, who are looking for thin and modular lighting fixtures. With SlimPro, it's possible to mount slim lines of light up to 3,375m without the need of joints. A selection of finishing colours starting from white, black to silver. The LED profiles come as well with the options to be configured in ON-OFF, DALI or CASAMBI.

<b>MOUNTING TYPE</b>	Suspension
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Silver, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF


**TECHNICAL DRAWING**
**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 195 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**ICONOGRAPHY**

**ORIS SLIM PRO LOW GLARE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
570	7.8	TB, TS, TW	3000K	DA, NF	1482	1305	5245XX.05U6.930.FI
570	7.8	TB, TS, TW	4000K	DA, NF	1529	1347	5245XX.05U6.940.FI
850	11.8	TB, TS, TW	3000K	DA, NF	2223	1958	5245XX.08U6.930.FI
850	11.8	TB, TS, TW	4000K	DA, NF	2293	2020	5245XX.08U6.940.FI
1130	15.7	TB, TS, TW	3000K	DA, NF	2964	2611	5245XX.11U6.930.FI
1130	15.7	TB, TS, TW	4000K	DA, NF	3058	2694	5245XX.11U6.940.FI
1410	19.6	TB, TS, TW	3000K	DA, NF	3704	3264	5245XX.14U6.930.FI
1410	19.6	TB, TS, TW	4000K	DA, NF	3822	3367	5245XX.14U6.940.FI
1690	23.5	TB, TS, TW	3000K	DA, NF	4445	3916	5245XX.16U6.930.FI
1690	23.5	TB, TS, TW	4000K	DA, NF	4586	4041	5245XX.16U6.940.FI
1970	27.4	TB, TS, TW	3000K	DA, NF	5186	4569	5245XX.19U6.930.FI
1970	27.4	TB, TS, TW	4000K	DA, NF	5351	4714	5245XX.19U6.940.FI
2250	31.4	TB, TS, TW	3000K	DA, NF	5927	5222	5245XX.22U6.930.FI
2250	31.4	TB, TS, TW	4000K	DA, NF	6115	5387	5245XX.22U6.940.FI
2530	35.3	TB, TS, TW	3000K	DA, NF	6668	5874	5245XX.25U6.930.FI
2530	35.3	TB, TS, TW	4000K	DA, NF	6880	6061	5245XX.25U6.940.FI
2810	39.2	TB, TS, TW	3000K	DA, NF	7409	6527	5245XX.28U6.930.FI
2810	39.2	TB, TS, TW	4000K	DA, NF	7644	6734	5245XX.28U6.940.FI
3090	43.1	TB, TS, TW	3000K	DA, NF	8150	7180	5245XX.30U6.930.FI
3090	43.1	TB, TS, TW	4000K	DA, NF	8408	7408	5245XX.30U6.940.FI
3370	47	TB, TS, TW	3000K	DA, NF	8891	7833	5245XX.33U6.930.FI
3370	47	TB, TS, TW	4000K	DA, NF	9173	8081	5245XX.33U6.940.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**ACCESSORIES**


<b>Suspension Kit</b>	<b>Silver</b>
Suspension kit 1,5m (1un)	80303017.SL
Suspension kit 3 m (1un)	80303018.SL
Suspension kit 5 m (1un)	80303019.SL

	<p>Ceiling Rose Recessed Ceiling Rose Recessed</p>	<p>Textured White 80303020.TW</p>	<p>Textured Silver 80303020.TS</p>	<p>Textured Black 80303020.TB</p>
	<p>Ceiling Rose Surface Ceiling Rose Surface</p>	<p>Textured White 80303021.TW</p>	<p>Textured Silver 80303021.TS</p>	<p>Textured Black 80303021.TB</p>
	<p>Power Cable 0,75 Power Cable 1.5m Power Cable 3m Power Cable 5m</p>	<p>ON/OFF 80303001 80303002 80303003</p>	<p>DALI Push 80303004 80303005 80303006</p>	
	<p>CASAMBI - DALI Interface CASAMBI - DALI Interface</p>	<p>CASAMBI 8030-2590</p>		