

**DESCRIPTION**


The PROLINER is a magical line of light. Consisting of particularly narrow modules, it allows the creation of a versatile light line in a low-voltage magnetic rail. It is composed of 3 different light modules. A module with opal or prismatic polycarbonate diffuser, a module with a low glare reflector, and a module with a 30° lens to control the beam angle. By combining these modules, the PROLINER draws a thin and elegant light line through its opal polycarbonate diffuser. In the low glare version, the light is emitted in a recessed way, protecting the eyes and highlighting the more reliably colours of the lightened objects. The option with a 30° lens allows creating the best light distribution according to the space and to focus the light on specific points. The magnetic application allows the greater flexibility of light configuration in space, and can be reconfigured with complete freedom, without resorting to specialized technicians or special tools. The magnetic rails where the PROLINER is installed are low voltage (48V). PROLINER has been specially designed to be combined with APALIS or ROSS. These discreet application luminaires in magnetic rails are specially intended for lighting projects where the reconfiguration of spaces and objects may occur regularly, such as, stores, art galleries, museums, exhibition venues, etc... Together, these products can make your lighting project a truly magical space.

<b>MOUNTING</b>	Magnetic
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	/
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 142 lm/W
<b>CRI</b>	CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**



**TECHNICAL DRAWING**

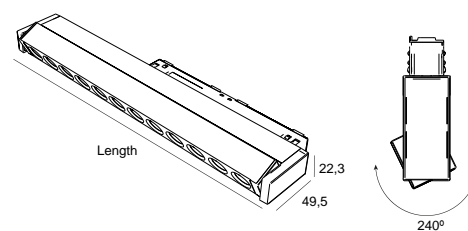



PROLINER LENS AJUST.  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
310	4,1	, TB, TW	, CS, DL, NF	30	555	509	3000K	501CS.03L3.9BA.BL
310	4,1	, TB, TW	, CS, DL, NF	30	555	509	3000K	501CS.03L3.9BA.WH
310	4,1	, TB, TW	, CS, DL, NF	30	555	509	3000K	501DL.03L3.9BA.BL
310	4,1	, TB, TW	, CS, DL, NF	30	555	509	3000K	501DL.03L3.9BA.WH
310	4,1	, TB, TW	, CS, DL, NF	30	555	509	3000K	501NF.03L3.9BA.BL
310	4,1	, TB, TW	, CS, DL, NF	30	555	509	3000K	501NF.03L3.9BA.WH
310	4,1	, TB, TW	, CS, DL, NF	30	555	509	3000K	501XX.03L3.9BA.FI
310	4,1	, TB, TW	, CS, DL, NF	30	582	534	4000K	501CS.03L3.940.BL
310	4,1	, TB, TW	, CS, DL, NF	30	582	534	4000K	501CS.03L3.940.WH
310	4,1	, TB, TW	, CS, DL, NF	30	582	534	4000K	501DL.03L3.940.BL
310	4,1	, TB, TW	, CS, DL, NF	30	582	534	4000K	501DL.03L3.940.WH
310	4,1	, TB, TW	, CS, DL, NF	30	582	534	4000K	501NF.03L3.940.BL
310	4,1	, TB, TW	, CS, DL, NF	30	582	534	4000K	501NF.03L3.940.WH
310	4,1	, TB, TW	, CS, DL, NF	30	582	534	4000K	501XX.03L3.940.FI
590	8,2	, TB, TW	, CS, DL, NF	30	1109	1017	3000K	501CS.05L3.9BA.BL
590	8,2	, TB, TW	, CS, DL, NF	30	1109	1017	3000K	501CS.05L3.9BA.WH
590	8,2	, TB, TW	, CS, DL, NF	30	1109	1017	3000K	501DL.05L3.9BA.BL
590	8,2	, TB, TW	, CS, DL, NF	30	1109	1017	3000K	501DL.05L3.9BA.WH
590	8,2	, TB, TW	, CS, DL, NF	30	1109	1017	3000K	501NF.05L3.9BA.BL
590	8,2	, TB, TW	, CS, DL, NF	30	1109	1017	3000K	501NF.05L3.9BA.WH
590	8,2	, TB, TW	, CS, DL, NF	30	1109	1017	3000K	501XX.05L3.9BA.FI
590	8,2	, TB, TW	, CS, DL, NF	30	1164	1068	4000K	501CS.05L3.940.BL
590	8,2	, TB, TW	, CS, DL, NF	30	1164	1068	4000K	501CS.05L3.940.WH
590	8,2	, TB, TW	, CS, DL, NF	30	1164	1068	4000K	501DL.05L3.940.BL
590	8,2	, TB, TW	, CS, DL, NF	30	1164	1068	4000K	501DL.05L3.940.WH
590	8,2	, TB, TW	, CS, DL, NF	30	1164	1068	4000K	501NF.05L3.940.BL
590	8,2	, TB, TW	, CS, DL, NF	30	1164	1068	4000K	501NF.05L3.940.WH
590	8,2	, TB, TW	, CS, DL, NF	30	1164	1068	4000K	501XX.05L3.940.FI
870	12,3	, TB, TW	, CS, DL, NF	30	1664	1526	3000K	501CS.08L3.9BA.BL
870	12,3	, TB, TW	, CS, DL, NF	30	1664	1526	3000K	501CS.08L3.9BA.WH
870	12,3	, TB, TW	, CS, DL, NF	30	1664	1526	3000K	501DL.08L3.9BA.BL
870	12,3	, TB, TW	, CS, DL, NF	30	1664	1526	3000K	501DL.08L3.9BA.WH
870	12,3	, TB, TW	, CS, DL, NF	30	1664	1526	3000K	501NF.08L3.9BA.BL
870	12,3	, TB, TW	, CS, DL, NF	30	1664	1526	3000K	501NF.08L3.9BA.WH
870	12,3	, TB, TW	, CS, DL, NF	30	1664	1526	3000K	501XX.08L3.9BA.FI
870	12,3	, TB, TW	, CS, DL, NF	30	1746	1601	4000K	501CS.08L3.940.BL
870	12,3	, TB, TW	, CS, DL, NF	30	1746	1601	4000K	501CS.08L3.940.WH
870	12,3	, TB, TW	, CS, DL, NF	30	1746	1601	4000K	501DL.08L3.940.BL
870	12,3	, TB, TW	, CS, DL, NF	30	1746	1601	4000K	501DL.08L3.940.WH
870	12,3	, TB, TW	, CS, DL, NF	30	1746	1601	4000K	501NF.08L3.940.BL
870	12,3	, TB, TW	, CS, DL, NF	30	1746	1601	4000K	501NF.08L3.940.WH
870	12,3	, TB, TW	, CS, DL, NF	30	1746	1601	4000K	501XX.08L3.940.FI


SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	30°	30
DALI	DL	Textured White	TW		
ON/OFF	NF				


ACCESSORIES

 BT1E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M


White      Black  
3080-0175E.WH    3080-0175E.BL  
3080-0176E.WH    3080-0176E.BL

 BT2E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White      Black  
3080-0177E.WH    3080-0177E.BL  
3080-0178E.WH    3080-0178E.BL

 TK3 Magnetic Track  
Magnetic Track 48V 1M  
Magnetic Track 48V 2M

White      Black  
3080-0205.WH    3080-0205.BL  
3080-0206.WH    3080-0206.BL

 TK5E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White      Black  
3080-0250E.WH    3080-0250E.BL  
3080-0251E.WH    3080-0251E.BL

TK9E - Track 48V EVO  
Track 48V EVO 1M

White      Black  
3080-0211E.WH    3080-0211E.BL



Track 48V EVO 2M

3080-0212E.WH 3080-0212E.BL