

DESCRIPTION

The PROLINER is a magical line of light. Consisting of particularly narrow modules, it allows the creation of a versatile light line in a low-voltage magnetic rail. It is composed of 3 different light modules. A module with opal or prismatic polycarbonate diffuser, a module with a low glare reflector, and a module with a 30° lens to control the beam angle. By combining these modules, the PROLINER draws a thin and elegant light line through its opal polycarbonate diffuser. In the low glare version, the light is emitted in a recessed way, protecting the eyes and highlighting the more reliably colours of the lightened objects. The option with a 30° lens allows creating the best light distribution according to the space and to focus the light on specific points. The magnetic application allows the greater flexibility of light configuration in space, and can be reconfigured with complete freedom, without resorting to specialized technicians or special tools. The magnetic rails where the PROLINER is installed are low voltage (48V). PROLINER has been specially designed to be combined with APALIS or ROSS. These discreet application luminaires in magnetic rails are specially intended for lighting projects where the reconfiguration of spaces and objects may occur regularly, such as, stores, art galleries, museums, exhibition venues, etc... Together, these products can make your lighting project a truly magical space.

MOUNTING TYPE	Magnetic
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Black
CONTROL	CASAMBI, DALI, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 109 lm/W
CRI	CRI→95
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

PROLINER LENS ADJUSTABLE
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→95

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
310	4.2	BL	CS, DL, NF	30	452	414	3000K	355XX.03L3.95BA.FI
590	8.3	BL	CS, DL, NF	30	903	828	3000K	355XX.05L3.95BA.FI
870	12.5	BL	CS, DL, NF	30	1353	1241	3000K	355XX.08L3.95BA.FI

SELECT YOUR PREFERRED OPTION


CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Black	BL	30°	30
DALI	DL				
ON/OFF	NF				

ACCESSORIES

	BT1E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0175E.WH 3080-0176E.WH	Black 3080-0175E.BL 3080-0176E.BL
--	---	---	---

	BT2E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0177E.WH 3080-0178E.WH	Black 3080-0177E.BL 3080-0178E.BL
--	---	---	---

	TK3 Magnetic Track Magnetic Track 48V 1M Magnetic Track 48V 2M	White 3080-0205.WH 3080-0206.WH	Black 3080-0205.BL 3080-0206.BL
--	---	---------------------------------------	---------------------------------------

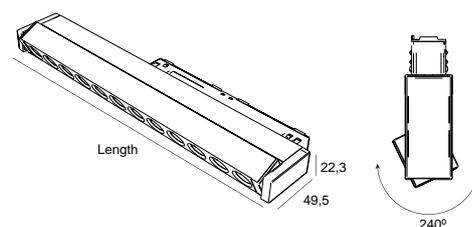
TECHNICAL DRAWING




TK5E - Track 48V EVO
Track 48V EVO 1M
Track 48V EVO 2M

White	Black
3080-0250E.WH	3080-0250E.BL
3080-0251E.WH	3080-0251E.BL




TK9E - Track 48V EVO
Track 48V EVO 1M
Track 48V EVO 2M

White	Black
3080-0211E.WH	3080-0211E.BL
3080-0212E.WH	3080-0212E.BL


PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo

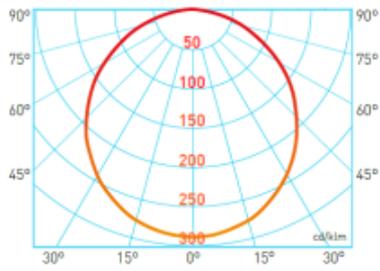


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

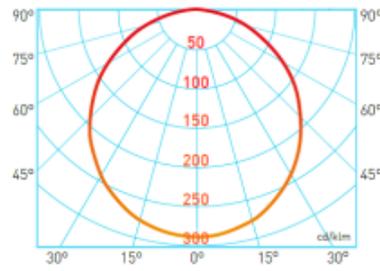

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

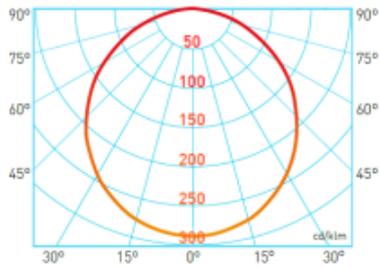

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM