

**DESCRIPTION**

The PROLINER is a magical line of light. Consisting of particularly narrow modules, it allows the creation of a versatile light line in a low-voltage magnetic rail. It is composed of 3 different light modules. A module with opal or prismatic polycarbonate diffuser, a module with a low glare reflector, and a module with a 30° lens to control the beam angle. By combining these modules, the PROLINER draws a thin and elegant light line through its opal polycarbonate diffuser. In the low glare version, the light is emitted in a recessed way, protecting the eyes and highlighting the more reliably colours of the lightened objects. The option with a 30° lens allows creating the best light distribution according to the space and to focus the light on specific points. The magnetic application allows the greater flexibility of light configuration in space, and can be reconfigured with complete freedom, without resorting to specialized technicians or special tools. The magnetic rails where the PROLINER is installed are low voltage (48V). PROLINER has been specially designed to be combined with APALIS or ROSS. These discreet application luminaires in magnetic rails are specially intended for lighting projects where the reconfiguration of spaces and objects may occur regularly, such as, stores, art galleries, museums, exhibition venues, etc... Together, these products can make your lighting project a truly magical space.

<b>MOUNTING TYPE</b>	Magnetic
<b>LIGHT DISTRIBUTION</b>	Directa
<b>POWER SUPPLY</b>	48V / TRACK
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Black
<b>CONTROL</b>	CASAMBI, DALI, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 109 lm/W
<b>CRI</b>	CRI→95
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**PROLINER LENS ADJUSTABLE**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→95**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
310	4.2	BL	CS, DL, NF	30	452	414	3000K	355XX.03L3.95BA.FI
590	8.3	BL	CS, DL, NF	30	903	828	3000K	355XX.05L3.95BA.FI
870	12.5	BL	CS, DL, NF	30	1353	1241	3000K	355XX.08L3.95BA.FI

**SELECT YOUR PREFERRED OPTION**


CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Black	BL	30°	30
DALI	DL				
ON/OFF	NF				

**ACCESSORIES**

	<b>BT1E - Track 48V EVO</b>	White	Black
	Track 48V EVO 1M	3080-0175E.WH	3080-0175E.BL
	Track 48V EVO 2M	3080-0176E.WH	3080-0176E.BL

	<b>BT2E - Track 48V EVO</b>	White	Black
	Track 48V EVO 1M	3080-0177E.WH	3080-0177E.BL
	Track 48V EVO 2M	3080-0178E.WH	3080-0178E.BL

	<b>TK3 Magnetic Track</b>	White	Black
	Magnetic Track 48V 1M	3080-0205.WH	3080-0205.BL
	Magnetic Track 48V 2M	3080-0206.WH	3080-0206.BL

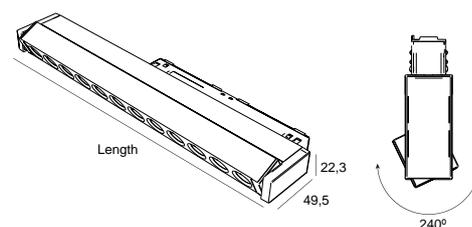
**TECHNICAL DRAWING**




TK5E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0250E.WH	3080-0250E.BL
3080-0251E.WH	3080-0251E.BL




TK9E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0211E.WH	3080-0211E.BL
3080-0212E.WH	3080-0212E.BL


**PHOTOMETRIC DATA**

**POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo**

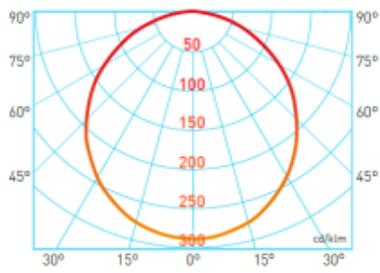


1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

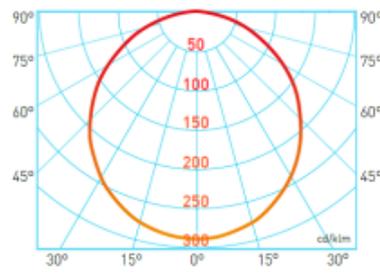

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM

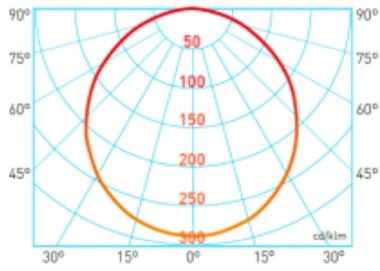

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 4000K CRI90 1120MM