

**DESCRIPTION**

The PROLINER LOW GLARE 48V MICRO is a light module developed for use in MICRO 48V tracks, offering maximum flexibility in lighting dynamic spaces. It stands out for its recessed light emission and low glare (UGR), protecting the eyes in demanding environments. The HIGH OUTPUT version combines recessed light technology with high light output, making it ideal for areas that require greater light intensity without compromising visual comfort.


LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Black, White
CONTROL	DALI




**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 81 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

**TECHNICAL DRAWING**

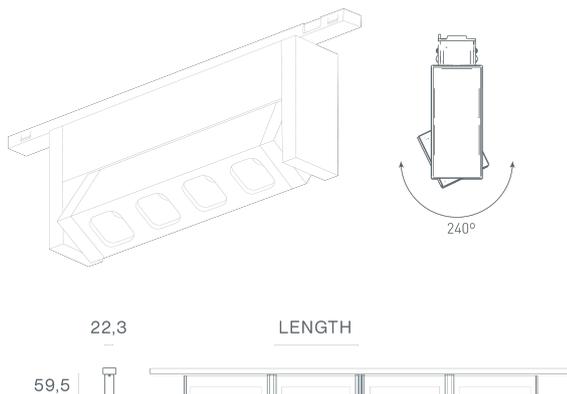

**ICONOGRAPHY**



**PROLINER ADJ. LG MICRO**  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
123	8.8	BL, WH	DL	60	709	625	3000K	549XX.01U6.930.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Black White	BL WH	60°	60