

**DESCRIPTION**

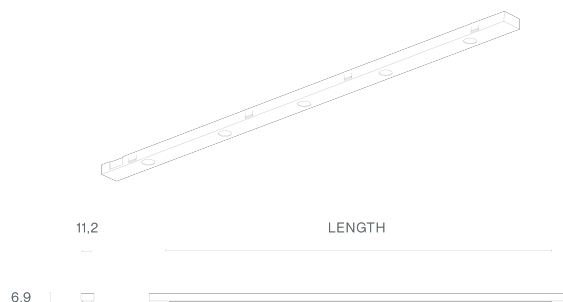
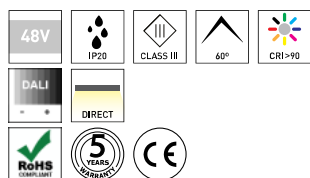
The PROLINER FLAT LOW GLARE 48V MICRO light modules in the OPAL or LOW GLARE versions are extremely narrow and compact, forming a super-thin line of light on the ceiling or wall. The opal polycarbonate diffuser provides soft, uniform light, while the low glare reflector emits small recessed points of light, significantly reducing the glare index (UGR), minimising visual discomfort and protecting the eyes.

Designed for installation in low-voltage (48V) MICRO tracks, these modules are intended for projects where lighting must be effective but visually discreet and almost imperceptible.

LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Black
CONTROL	DALI


**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 90 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**PROLINER FLAT LG MICRO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
300	4.9	BL	DL	60	440	384	3000K	546XX.03U6.930.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Black	BL	60°	60