


**DESCRIPTION**

The PROLINER is a magical line of light. Consisting of particularly narrow modules, it allows the creation of a versatile light line in a low-voltage magnetic rail. It is composed of 3 different light modules. A module with opal or prismatic polycarbonate diffuser, a module with a low glare reflector, and a module with a 60° lens to control the beam angle. By combining these modules, the PROLINER draws a thin and elegant light line through its opal polycarbonate diffuser. In the low glare version, the light is emitted in a recessed way, protecting the eyes and highlighting the more reliably colours of the lightened objects. The option with a 60° lens allows creating the best light distribution according to the space and to focus the light on specific points. The magnetic application allows the greater flexibility of light configuration in space, and can be reconfigured with complete freedom, without resorting to specialized technicians or special tools. The magnetic rails where the PROLINER is installed are low voltage (48V). PROLINER has been specially designed to be combined with APALIS or ROSS. These discreet application luminaires in magnetic rails are specially intended for lighting projects where the reconfiguration of spaces and objects may occur regularly, such as, stores, art galleries, museums, exhibition venues, etc... Together, these products can make your lighting project a truly magical space.

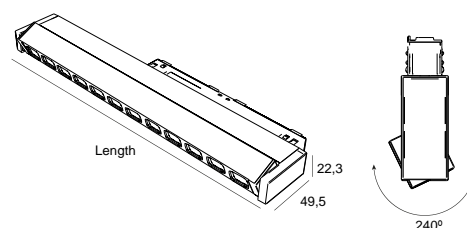

<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	48V / TRACK
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI, ON/OFF

**TECHNICAL DRAWING**

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 195 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**PROLINER L.G. AD. 48V EVO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
310	3.9	TB, TW	CS, DL, NF	60	670	591	2700K	5500XX.03U6.927.FI
310	3.9	TB, TW	CS, DL, NF	60	741	653	3000K	5500XX.03U6.930.FI
310	3.9	TB, TW	CS, DL, NF	60	764	673	4000K	5500XX.03U6.940.FI
590	7.8	TB, TW	CS, DL, NF	60	1341	1181	2700K	5500XX.05U6.927.FI
590	7.8	TB, TW	CS, DL, NF	60	1482	1305	3000K	5500XX.05U6.930.FI
590	7.8	TB, TW	CS, DL, NF	60	1529	1347	4000K	5500XX.05U6.940.FI
870	11.8	TB, TW	CS, DL, NF	60	2011	1772	2700K	5500XX.08U6.927.FI
870	11.8	TB, TW	CS, DL, NF	60	2223	1958	3000K	5500XX.08U6.930.FI
870	11.8	TB, TW	CS, DL, NF	60	2293	2020	4000K	5500XX.08U6.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	60°	60
DALI	DL	Textured White	TW		
ON/OFF	NF				

**ACCESSORIES**

	<b>BT15E - Track 48V EVO</b>	White	Black
	Track 48V EVO 1M	3080-0227E.WH	3080-0227E.BL
	Track 48V EVO 2M	3080-0228E.WH	3080-0228E.BL

	<b>BT1E - Track 48V EVO</b>	White	Black
	Track 48V EVO 1M	3080-0175E.WH	3080-0175E.BL
	Track 48V EVO 2M	3080-0176E.WH	3080-0176E.BL



**BT2E - Track 48V EVO**  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0177E.WH	3080-0177E.BL
3080-0178E.WH	3080-0178E.BL



**TK18E - Track 48V EVO**  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0231E.WH	3080-0231E.BL
3080-0232E.WH	3080-0232E.BL



**TK5E - Track 48V EVO**  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0250E.WH	3080-0250E.BL
3080-0251E.WH	3080-0251E.BL



**TK9E - Track 48V EVO**  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0211E.WH	3080-0211E.BL
3080-0212E.WH	3080-0212E.BL