

DESCRIPTION

The PROLINER is a magical line of light. Consisting of particularly narrow modules, it allows the creation of a versatile light line in a low-voltage magnetic rail. It is composed of 3 different light modules. A module with opal or prismatic polycarbonate diffuser, a module with a low glare reflector, and a module with a 60° lens to control the beam angle. By combining these modules, the PROLINER draws a thin and elegant light line through its opal polycarbonate diffuser. In the low glare version, the light is emitted in a recessed way, protecting the eyes and highlighting the more reliably colours of the lightened objects. The option with a 60° lens allows creating the best light distribution according to the space and to focus the light on specific points. The magnetic application allows the greater flexibility of light configuration in space, and can be reconfigured with complete freedom, without resorting to specialized technicians or special tools. The magnetic rails where the PROLINER is installed are low voltage (48V). PROLINER has been specially designed to be combined with APALIS or ROSS. These discreet application luminaires in magnetic rails are specially intended for lighting projects where the reconfiguration of spaces and objects may occur regularly, such as, stores, art galleries, museums, exhibition venues, etc... Together, these products can make your lighting project a truly magical space.

MOUNTING TYPE	, Magnetic
LIGHT DISTRIBUTION	, Direct
POWER SUPPLY	/
WARRANTY	, 5 Years
FINISHING	, Textured Black, Textured White
CONTROL	, CASAMBI, DALI, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 142 lm/W
CRI	CRI>90
LIFESPAN	, 50.000 Hours
STEPS MACADAM	, 3 Steps MacAdam
LUMEN MAINTENANCE	, L90/B50
PHOTOBIOLOGICAL RISK	, RG1

ICONOGRAPHY



TECHNICAL DRAWING

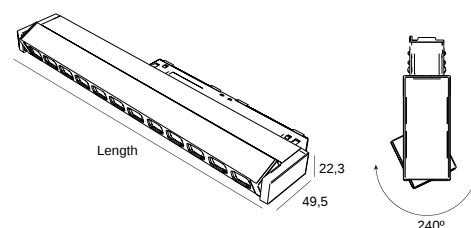



PROLINER L.GLARE AJUST.
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
310	4.1	, TB, TW	, CS, DL, NF	60	555	489	3000K	500CS.03U6.930.BL
310	4.1	, TB, TW	, CS, DL, NF	60	555	489	3000K	500CS.03U6.930.WH
310	4.1	, TB, TW	, CS, DL, NF	60	555	489	3000K	500DL.03U6.930.BL
310	4.1	, TB, TW	, CS, DL, NF	60	555	489	3000K	500DL.03U6.930.WH
310	4.1	, TB, TW	, CS, DL, NF	60	555	489	3000K	500NF.03U6.930.BL
310	4.1	, TB, TW	, CS, DL, NF	60	555	489	3000K	500NF.03U6.930.WH
310	4.1	, TB, TW	, CS, DL, NF	60	555	489	3000K	500XX.03U6.930.FI
310	4.1	, TB, TW	, CS, DL, NF	60	582	513	4000K	500CS.03U6.940.BL
310	4.1	, TB, TW	, CS, DL, NF	60	582	513	4000K	500CS.03U6.940.WH
310	4.1	, TB, TW	, CS, DL, NF	60	582	513	4000K	500DL.03U6.940.BL
310	4.1	, TB, TW	, CS, DL, NF	60	582	513	4000K	500DL.03U6.940.WH
310	4.1	, TB, TW	, CS, DL, NF	60	582	513	4000K	500NF.03U6.940.BL
310	4.1	, TB, TW	, CS, DL, NF	60	582	513	4000K	500NF.03U6.940.WH
310	4.1	, TB, TW	, CS, DL, NF	60	582	513	4000K	500XX.03U6.940.FI
590	8.2	, TB, TW	, CS, DL, NF	60	1109	977	3000K	500CS.05U6.930.BL
590	8.2	, TB, TW	, CS, DL, NF	60	1109	977	3000K	500CS.05U6.930.WH
590	8.2	, TB, TW	, CS, DL, NF	60	1109	977	3000K	500DL.05U6.930.BL
590	8.2	, TB, TW	, CS, DL, NF	60	1109	977	3000K	500DL.05U6.930.WH
590	8.2	, TB, TW	, CS, DL, NF	60	1109	977	3000K	500NF.05U6.930.BL
590	8.2	, TB, TW	, CS, DL, NF	60	1109	977	3000K	500NF.05U6.930.WH
590	8.2	, TB, TW	, CS, DL, NF	60	1109	977	3000K	500XX.05U6.930.FI
590	8.2	, TB, TW	, CS, DL, NF	60	1164	1025	4000K	500CS.05U6.940.BL
590	8.2	, TB, TW	, CS, DL, NF	60	1164	1025	4000K	500CS.05U6.940.WH
590	8.2	, TB, TW	, CS, DL, NF	60	1164	1025	4000K	500DL.05U6.940.BL
590	8.2	, TB, TW	, CS, DL, NF	60	1164	1025	4000K	500DL.05U6.940.WH
590	8.2	, TB, TW	, CS, DL, NF	60	1164	1025	4000K	500NF.05U6.940.BL
590	8.2	, TB, TW	, CS, DL, NF	60	1164	1025	4000K	500NF.05U6.940.WH
590	8.2	, TB, TW	, CS, DL, NF	60	1164	1025	4000K	500XX.05U6.940.FI
870	12.3	, TB, TW	, CS, DL, NF	60	1664	1466	3000K	500CS.08U6.930.BL
870	12.3	, TB, TW	, CS, DL, NF	60	1664	1466	3000K	500CS.08U6.930.WH
870	12.3	, TB, TW	, CS, DL, NF	60	1664	1466	3000K	500DL.08U6.930.BL
870	12.3	, TB, TW	, CS, DL, NF	60	1664	1466	3000K	500DL.08U6.930.WH
870	12.3	, TB, TW	, CS, DL, NF	60	1664	1466	3000K	500NF.08U6.930.BL
870	12.3	, TB, TW	, CS, DL, NF	60	1664	1466	3000K	500NF.08U6.930.WH
870	12.3	, TB, TW	, CS, DL, NF	60	1664	1466	3000K	500XX.08U6.930.FI
870	12.3	, TB, TW	, CS, DL, NF	60	1746	1538	4000K	500CS.08U6.940.BL
870	12.3	, TB, TW	, CS, DL, NF	60	1746	1538	4000K	500CS.08U6.940.WH
870	12.3	, TB, TW	, CS, DL, NF	60	1746	1538	4000K	500DL.08U6.940.BL
870	12.3	, TB, TW	, CS, DL, NF	60	1746	1538	4000K	500DL.08U6.940.WH
870	12.3	, TB, TW	, CS, DL, NF	60	1746	1538	4000K	500NF.08U6.940.BL
870	12.3	, TB, TW	, CS, DL, NF	60	1746	1538	4000K	500NF.08U6.940.WH
870	12.3	, TB, TW	, CS, DL, NF	60	1746	1538	4000K	500XX.08U6.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
CASAMBI	CS
DALI	DL
ON/OFF	NF

FINISHING	FI
Textured Black	TB
Textured White	TW

BEAM ANGLE	BA
60°	60

ACCESSORIES



BT1 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0175.WH	3080-0175.BL
Magnetic Track 48V 2M	3080-0176.WH	3080-0176.BL



BT2 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0177.WH	3080-0177.BL
Magnetic Track 48V 2M	3080-0178.WH	3080-0178.BL



TK3 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0205.WH	3080-0205.BL
Magnetic Track 48V 2M	3080-0206.WH	3080-0206.BL



TK5 48V Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0250.WH	3080-0250.BL
Magnetic Track 48V 2M	3080-0251.WH	3080-0251.BL

TK9 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0211.WH	3080-0211.BL



Magnetic Track 48V 2M

3080-0212.WH 3080-0212.BL