

DESCRIPTION

The PROLINER LOW GLARE 48V MICRO is a light module developed for use in MICRO 48V tracks, offering maximum flexibility in lighting dynamic spaces. It stands out for its recessed light emission and low glare (UGR), protecting the eyes in demanding environments. The HIGH OUTPUT version combines recessed light technology with high light output, making it ideal for areas that require greater light intensity without compromising visual comfort.


LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Black, White
CONTROL	DALI




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 81 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

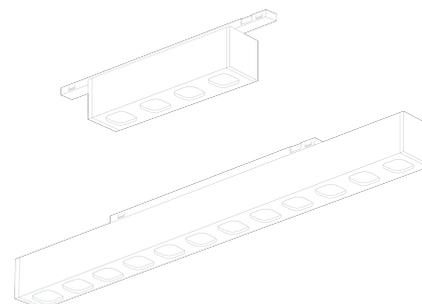

ICONOGRAPHY



PROLINER LG H. OUT MICRO
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
98	8.8	BL, WH	DL	60	709	625	3000K	548XX.01U6.930.FI
285	11.2	BL, WH	DL	60	1146	1010	3000K	548XX.02U6.930.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Black	BL	60°	60
		White	WH		