

DESCRIPTION

PROLINER lighting fixture for 48V EVO tracks application, in extruded aluminium, anodized black finishing. Direct emission of luminous flux. 60° beam angle LOW GLARE reflectors. CRI→90.

Available in 3000K and 4000K colour temperatures.


LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF

LED FEATURES


LUMINOUS EFFICIENCY	UP TO 195 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



TECHNICAL DRAWING

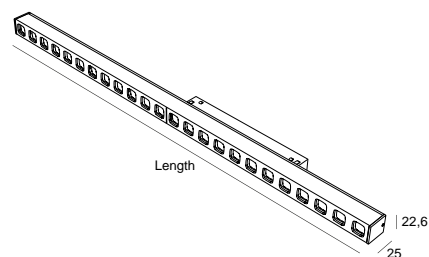

ICONOGRAPHY



PROLINER L.GLARE 48V EVO
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	7,8	TB, TW	CS, DL, NF	60	1341	1181	2700K	5154XX.05U6.927.FI
570	7,8	TB, TW	CS, DL, NF	60	1482	1305	3000K	5154XX.05U6.930.FI
570	7,8	TB, TW	CS, DL, NF	60	1529	1347	4000K	5154XX.05U6.940.FI
850	11,8	TB, TW	CS, DL, NF	60	2011	1772	2700K	5154XX.08U6.927.FI
850	11,8	TB, TW	CS, DL, NF	60	2223	1958	3000K	5154XX.08U6.930.FI
850	11,8	TB, TW	CS, DL, NF	60	2293	2020	4000K	5154XX.08U6.940.FI
1130	15,7	TB, TW	CS, DL, NF	60	2681	2362	2700K	5154XX.11U6.927.FI
1130	15,7	TB, TW	CS, DL, NF	60	2964	2611	3000K	5154XX.11U6.930.FI
1130	15,7	TB, TW	CS, DL, NF	60	3058	2694	4000K	5154XX.11U6.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	60°	60
DALI	DL	Textured White	TW		
ON/OFF	NF				

ACCESSORIES

	BT15E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0227E.WH	3080-0227E.BL
	Track 48V EVO 2M	3080-0228E.WH	3080-0228E.BL

	BT1E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0175E.WH	3080-0175E.BL
	Track 48V EVO 2M	3080-0176E.WH	3080-0176E.BL

	BT2E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0177E.WH	3080-0177E.BL
	Track 48V EVO 2M	3080-0178E.WH	3080-0178E.BL

	TK18E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0231E.WH	3080-0231E.BL
	Track 48V EVO 2M	3080-0232E.WH	3080-0232E.BL



TK5E - Track 48V EVO
Track 48V EVO 1M
Track 48V EVO 2M

White	Black
3080-0250E.WH	3080-0250E.BL
3080-0251E.WH	3080-0251E.BL



TK9E - Track 48V EVO
Track 48V EVO 1M
Track 48V EVO 2M

White	Black
3080-0211E.WH	3080-0211E.BL
3080-0212E.WH	3080-0212E.BL