

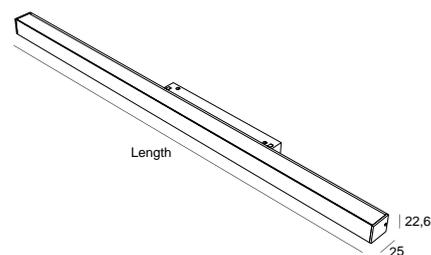
**DESCRIPTION**

PROLINER lighting fixture for 48V EVO tracks application, in extruded aluminium, anodized black finishing. Direct emission of luminous flux. Opal or microprismatic diffuser. CRI→90. 90° beam angle. Available in 3000K and 4000K colour temperatures.

DISTRIBUICAOLUZ	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF

**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 201 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**PROLINER OPAL 48V EVO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	10.7	TB, TW	CS, DL, NF	90	1952	1366	2700K	5353XX.0509.927.FI
570	10.7	TB, TW	CS, DL, NF	90	2102	1471	3000K	5353XX.0509.930.FI
570	10.7	TB, TW	CS, DL, NF	90	2156	1509	4000K	5353XX.0509.940.FI
850	16.1	TB, TW	CS, DL, NF	90	2928	2050	2700K	5353XX.0809.927.FI
850	16.1	TB, TW	CS, DL, NF	90	3153	2207	3000K	5353XX.0809.930.FI
850	16.1	TB, TW	CS, DL, NF	90	3234	2264	4000K	5353XX.0809.940.FI
1130	21.5	TB, TW	CS, DL, NF	90	3904	2733	2700K	5353XX.1109.927.FI
1130	21.5	TB, TW	CS, DL, NF	90	4204	2943	3000K	5353XX.1109.930.FI
1130	21.5	TB, TW	CS, DL, NF	90	4311	3018	4000K	5353XX.1109.940.FI
1410	26.8	TB, TW	CS, DL, NF	90	4880	3416	2700K	5353XX.1409.927.FI
1410	26.8	TB, TW	CS, DL, NF	90	5255	3679	3000K	5353XX.1409.930.FI
1410	26.8	TB, TW	CS, DL, NF	90	5389	3773	4000K	5353XX.1409.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	90°	90
DALI	DL	Textured White	TW		
ON/OFF	NF				

**ACCESSORIES**

	BT15E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0227E.WH	3080-0227E.BL
	Track 48V EVO 2M	3080-0228E.WH	3080-0228E.BL

	BT1E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0175E.WH	3080-0175E.BL
	Track 48V EVO 2M	3080-0176E.WH	3080-0176E.BL

	BT2E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0177E.WH	3080-0177E.BL
	Track 48V EVO 2M	3080-0178E.WH	3080-0178E.BL

	TK18E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0231E.WH	3080-0231E.BL
	Track 48V EVO 2M	3080-0232E.WH	3080-0232E.BL



TK5E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0250E.WH	3080-0250E.BL
3080-0251E.WH	3080-0251E.BL



TK9E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0211E.WH	3080-0211E.BL
3080-0212E.WH	3080-0212E.BL