

**DESCRIPTION**

PROLINER lighting fixture for 48V EVO tracks application, in extruded aluminium, anodized black finishing. Direct emission of luminous flux. Opal or microprismatic diffuser. CRI→90. 90° beam angle. Available in 3000K and 4000K colour temperatures.


LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF

**LED FEATURES**


LUMINOUS EFFICIENCY	UP TO 201 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



**TECHNICAL DRAWING**

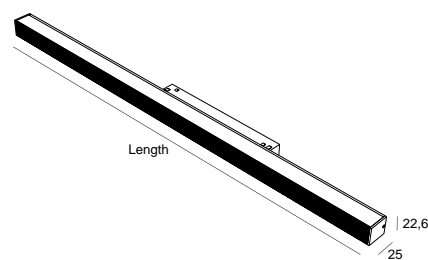

**ICONOGRAPHY**



**PROLINER PRISM. 48V EVO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
570	10,7	TB, TW	CS, DL, NF	80	1952	1698	2700K	5354XX.05P8.927.FI
570	10,7	TB, TW	CS, DL, NF	80	2102	1829	3000K	5354XX.05P8.930.FI
570	10,7	TB, TW	CS, DL, NF	80	2156	1875	4000K	5354XX.05P8.940.FI
850	16,1	TB, TW	CS, DL, NF	80	2928	2547	2700K	5354XX.08P8.927.FI
850	16,1	TB, TW	CS, DL, NF	80	3153	2743	3000K	5354XX.08P8.930.FI
850	16,1	TB, TW	CS, DL, NF	80	3234	2813	4000K	5354XX.08P8.940.FI
1130	21,5	TB, TW	CS, DL, NF	80	3904	3396	2700K	5354XX.11P8.927.FI
1130	21,5	TB, TW	CS, DL, NF	80	4204	3658	3000K	5354XX.11P8.930.FI
1130	21,5	TB, TW	CS, DL, NF	80	4311	3751	4000K	5354XX.11P8.940.FI
1410	26,8	TB, TW	CS, DL, NF	80	4880	4245	2700K	5354XX.14P8.927.FI
1410	26,8	TB, TW	CS, DL, NF	80	5255	4572	3000K	5354XX.14P8.930.FI
1410	26,8	TB, TW	CS, DL, NF	80	5389	4689	4000K	5354XX.14P8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	80°	80
DALI	DL	Textured White	TW		
ON/OFF	NF				

**ACCESSORIES**

	BT15E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0227E.WH	3080-0227E.BL
	Track 48V EVO 2M	3080-0228E.WH	3080-0228E.BL

	BT1E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0175E.WH	3080-0175E.BL
	Track 48V EVO 2M	3080-0176E.WH	3080-0176E.BL

	BT2E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0177E.WH	3080-0177E.BL
	Track 48V EVO 2M	3080-0178E.WH	3080-0178E.BL

	TK18E - Track 48V EVO	White	Black
	Track 48V EVO 1M	3080-0231E.WH	3080-0231E.BL
	Track 48V EVO 2M	3080-0232E.WH	3080-0232E.BL



TK5E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0250E.WH	3080-0250E.BL
3080-0251E.WH	3080-0251E.BL



TK9E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0211E.WH	3080-0211E.BL
3080-0212E.WH	3080-0212E.BL