

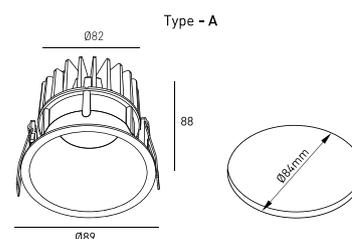
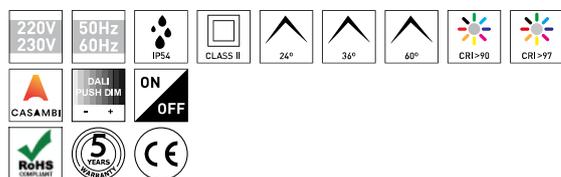
**DESCRIPTION**

One of the lighting trends are the aluminium trimless downlights, perfect for recessing in false ceilings. However, Brilumen being aware of the complexity of finishing ceiling work, we developed a variant of Monet with trims, the RENOIR fixture. This downlight, equipped with advanced technology, is available with 12°, 24°, 36°, 40° or 60° beam angles and an excellent textured white finishing.

<b>MOUNTING</b>	Recessed
<b>DISTRIBUICAOLUZ</b>	Directa
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 161 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**RENOIR DOWNLIGHT 8,6W**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
89	8.1	TW	CS, DA, NF	24, 36, 60	1203	1023	2700K	5348XX.BA.927.FI
89	8.1	TW	CS, DA, NF	24, 36, 60	1244	1057	3000K	5348XX.BA.930.FI
89	8.1	TW	CS, DA, NF	24, 36, 60	1300	1105	4000K	5348XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			36°	36
ON/OFF	NF			60°	60


**RENOIR DOWNLIGHT 8,6W**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
89	8.8	TW	CS, DA, NF	24, 36, 60	918	780	2700K	5348XX.BA.9727.FI
89	8.8	TW	CS, DA, NF	24, 36, 60	980	833	3000K	5348XX.BA.9730.FI
89	8.8	TW	CS, DA, NF	24, 36, 60	1033	878	4000K	5348XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			36°	36
ON/OFF	NF			60°	60