

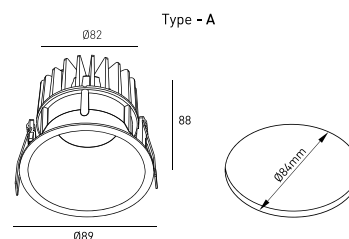
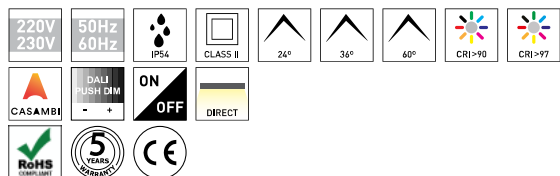
DESCRIPTION

One of the lighting trends are the aluminium trimless downlights, perfect for recessing in false ceilings. However, Brilumen being aware of the complexity of finishing ceiling work, we developed a variant of Monet with trims, the RENOIR fixture. This downlight, equipped with advanced technology, is available with 12°, 24°, 36°, 40° or 60° beam angles and an excellent textured white finishing.

MOUNTING	Recessed
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 161 lm/W
CRI	CRI->90, CRI->97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

RENOIR DOWNLIGHT TYPE A
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
89	8,1	TW	CS, DA, NF	24, 36, 60	1203	1023	2700K	5348XX.BA.927.FI
89	8,1	TW	CS, DA, NF	24, 36, 60	1244	1057	3000K	5348XX.BA.930.FI
89	8,1	TW	CS, DA, NF	24, 36, 60	1300	1105	4000K	5348XX.BA.940.FI

 SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			36°	36
ON/OFF	NF			60°	60

RENOIR DOWNLIGHT TYPE A
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
89	8,8	TW	CS, DA, NF	24, 36, 60	918	780	2700K	5348XX.BA.9727.FI
89	8,8	TW	CS, DA, NF	24, 36, 60	980	833	3000K	5348XX.BA.9730.FI
89	8,8	TW	CS, DA, NF	24, 36, 60	1033	878	4000K	5348XX.BA.9740.FI

 SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			36°	36
ON/OFF	NF			60°	60