

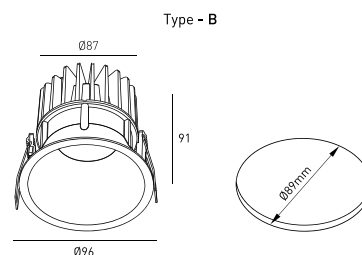
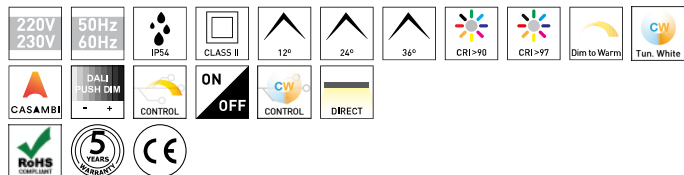
DESCRIPTION

One of the lighting trends are the aluminium trimless downlights, perfect for recessing in false ceilings. However, Brilumen being aware of the complexity of finishing ceiling work, we developed a variant of Monet with trims, the RENOIR fixture. This downlight, equipped with advanced technology, is available with 12°, 24°, 36°, 40° or 60° beam angles and an excellent textured white finishing.

MOUNTING	Recessed
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, Dim To Warm, ON/OFF, Tunable White


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 97 lm/W
CRI	CRI→90, CRI→97, Dim To Warm CRI→95, Tunable White CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

RENOIR DOWNLIGHT TYPE B
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
96	11,4	TW	CS, DA, NF	12, 24, 36	1637	1391	2700K	5349XX.BA.927.FI
96	11,4	TW	CS, DA, NF	12, 24, 36	1671	1420	3000K	5349XX.BA.930.FI
96	11,4	TW	CS, DA, NF	12, 24, 36	1785	1518	4000K	5349XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	12°	12
DALI / PUSH Dim	DA			24°	24
ON/OFF	NF			36°	36

RENOIR DOWNLIGHT TYPE B
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
96	12,8	TW	CS, DA, NF	12, 24, 36	1243	1056	2700K	5349XX.BA.9727.FI
96	12,8	TW	CS, DA, NF	12, 24, 36	1319	1122	3000K	5349XX.BA.9730.FI
96	12,8	TW	CS, DA, NF	12, 24, 36	1396	1187	4000K	5349XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	12°	12
DALI / PUSH Dim	DA			24°	24
ON/OFF	NF			36°	36

RENOIR DOWNLIGHT TYPE B
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Dim To Warm CRI→95

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
96	11,8	TW	DW	12, 24, 36	1148	975	Dim to Warm 1800k - 3000k	5349XX.BA.953018.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Dim To Warm	DW	Textured White	TW	12°	12
				24°	24
				36°	36



RENOIR DOWNLIGHT TYPE B
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
96	10,4	TW	TU	12, 24, 36	1159	985	TunableWhite 2700k - 6500k	5349XX.BA.92765.FI

SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Tunable White	TU	Textured White	TW	12°	12
				24°	24
				36°	36