


**DESCRIPTION**

REVO is an efficient LED lighting solution, ideal for large commercial areas such as supermarkets, storage areas and industrial environments. With its distinctive design and advanced technology, it achieves up to 203 lm/W and guarantees comfortable, high-quality lighting.

It allows flexible configurations with different modules (Efficiency, High Performance or blind cover) on a continuous track, reducing energy, installation and maintenance costs. Available in suspended or surface mounting, with or without emergency kit, and compatible with intelligent lighting systems.

The REVO system, made of extruded aluminium, has 5 years warranty time.


LIGHT DISTRIBUTION	Directa
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF

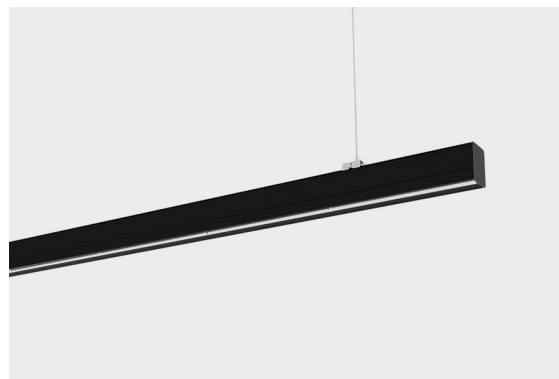


**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 203 lm/W
IK	IK08
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

**TECHNICAL DRAWING**

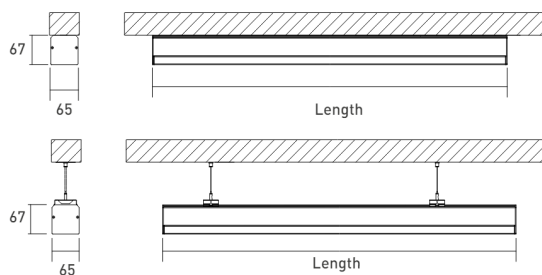

**ICONOGRAPHY**

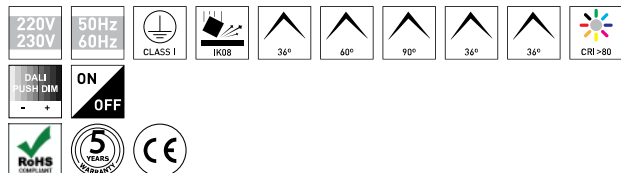



REVO HIGH PERFORMANCE  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
570	19,9	TB, TW	3000K	DA, NF	3818	3360	506XX.0530.830.FI
570	19,9	TB, TW	3000K	DA, NF	3818	3360	506XX.0560.830.FI
570	19,9	TB, TW	3000K	DA, NF	3818	3360	506XX.0590.830.FI
570	19,9	TB, TW	3000K	DA, NF	3818	3360	506XX.05AS.830.FI
570	19,9	TB, TW	3000K	DA, NF	3818	3360	506XX.05DAS.830.FI
570	19,9	TB, TW	3000K	DA, NF	3818	3360	506XX.05XXS.830.FI
570	19,9	TB, TW	4000K	DA, NF	4050	3564	506XX.0530.840.FI
570	19,9	TB, TW	4000K	DA, NF	4050	3564	506XX.0560.840.FI
570	19,9	TB, TW	4000K	DA, NF	4050	3564	506XX.0590.840.FI
570	19,9	TB, TW	4000K	DA, NF	4050	3564	506XX.05AS.840.FI
570	19,9	TB, TW	4000K	DA, NF	4050	3564	506XX.05DAS.840.FI
570	19,9	TB, TW	4000K	DA, NF	4050	3564	506XX.05XXS.840.FI
1130	39,8	TB, TW	3000K	DA, NF	7636	6720	506XX.1130.830.FI
1130	39,8	TB, TW	3000K	DA, NF	7636	6720	506XX.1160.830.FI
1130	39,8	TB, TW	3000K	DA, NF	7636	6720	506XX.1190.830.FI
1130	39,8	TB, TW	3000K	DA, NF	7636	6720	506XX.11AS.830.FI
1130	39,8	TB, TW	3000K	DA, NF	7636	6720	506XX.11DAS.830.FI
1130	39,8	TB, TW	3000K	DA, NF	7636	6720	506XX.11XXS.830.FI
1130	39,8	TB, TW	4000K	DA, NF	8100	7128	506XX.1130.840.FI
1130	39,8	TB, TW	4000K	DA, NF	8100	7128	506XX.1160.840.FI
1130	39,8	TB, TW	4000K	DA, NF	8100	7128	506XX.1190.840.FI
1130	39,8	TB, TW	4000K	DA, NF	8100	7128	506XX.11AS.840.FI
1130	39,8	TB, TW	4000K	DA, NF	8100	7128	506XX.11DAS.840.FI
1130	39,8	TB, TW	4000K	DA, NF	8100	7128	506XX.11XXS.840.FI
1690	59,7	TB, TW	3000K	DA, NF	11454	10080	506XX.1630.830.FI
1690	59,7	TB, TW	3000K	DA, NF	11454	10080	506XX.1660.830.FI
1690	59,7	TB, TW	3000K	DA, NF	11454	10080	506XX.1690.830.FI
1690	59,7	TB, TW	3000K	DA, NF	11454	10080	506XX.16AS.830.FI
1690	59,7	TB, TW	3000K	DA, NF	11454	10080	506XX.16DAS.830.FI
1690	59,7	TB, TW	3000K	DA, NF	11454	10080	506XX.16XXS.830.FI
1690	59,7	TB, TW	4000K	DA, NF	12150	10692	506XX.1630.840.FI
1690	59,7	TB, TW	4000K	DA, NF	12150	10692	506XX.1660.840.FI
1690	59,7	TB, TW	4000K	DA, NF	12150	10692	506XX.1690.840.FI
1690	59,7	TB, TW	4000K	DA, NF	12150	10692	506XX.16AS.840.FI
1690	59,7	TB, TW	4000K	DA, NF	12150	10692	506XX.16DAS.840.FI
1690	59,7	TB, TW	4000K	DA, NF	12150	10692	506XX.16XXS.840.FI
2250	79,6	TB, TW	3000K	DA, NF	15272	13439	506XX.2230.830.FI
2250	79,6	TB, TW	3000K	DA, NF	15272	13439	506XX.2260.830.FI
2250	79,6	TB, TW	3000K	DA, NF	15272	13439	506XX.2290.830.FI
2250	79,6	TB, TW	3000K	DA, NF	15272	13439	506XX.22AS.830.FI
2250	79,6	TB, TW	3000K	DA, NF	15272	13439	506XX.22DAS.830.FI
2250	79,6	TB, TW	3000K	DA, NF	15272	13439	506XX.22XXS.830.FI
2250	79,6	TB, TW	4000K	DA, NF	16200	14256	506XX.2230.840.FI
2250	79,6	TB, TW	4000K	DA, NF	16200	14256	506XX.2260.840.FI
2250	79,6	TB, TW	4000K	DA, NF	16200	14256	506XX.2290.840.FI
2250	79,6	TB, TW	4000K	DA, NF	16200	14256	506XX.22AS.840.FI
2250	79,6	TB, TW	4000K	DA, NF	16200	14256	506XX.22DAS.840.FI
2250	79,6	TB, TW	4000K	DA, NF	16200	14256	506XX.22XXS.840.FI

SELECT YOUR PREFERRED  
 OPTION

CONTROLTYPE	XX
DALI / PUSH Dim	DA
ON/OFF	NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW








ACCESSORIES

REVO Power Cable	5 m	3 m	1,5 m
3x1,5mm2 - 1,5M	30800265	30800261	30800257
5x1,5mm2 - 1,5M	30800266	30800262	30800258
7x1,5mm2 - 1,5M	30800267	30800263	30800259
9x1,5mm2 - 1,5M	30800268	30800264	30800260

REVO External Profile	White	Black
External profile 1130mm	3651130.TW	3651130.TB

REVO External Profile	White	Black
External profile 1690mm	3651700.TW	3651700.TB

REVO External Profile	White	Black
External profile 570mm	3650570.TW	3650570.TB

	<b>Suspension Kit</b> Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL		
	<b>REVO Blind Cover</b> Blind Cover 1700mm	Textured White 3671700.TW	Textured Black 3671700.TB	
	<b>Revo Wiring</b> Revo Wiring 3wr Revo Wiring 5wr Revo Wiring 7wr Revo Wiring 9wr	-	3WR.10.17 5WR.10.17 7WR.10.17 9WR.10.17	
	<b>End Cap for REVO</b> End Caps for REVO	Textured White 80303060.TW	Textured Black 80303060.TB	Anodized aluminium 80303060.AL
	<b>REVO/TREV Linear Joint</b> REVO/TREV Linear Joint	-	5004-014	
	<b>Mounting Clip</b> Mounting Clip	-	5004-020	
	<b>Emergency kit 150W 1H</b> Emergency kit 150W 1H	-	6080-006	
	<b>Emergency kit 150W 3H</b> Emergency kit 150W 3H	-	6080-007	
	<b>CASAMBI - DALI Interface</b> CASAMBI - DALI Interface	CASAMBI 8030-2590		