

**DESCRIPTION**

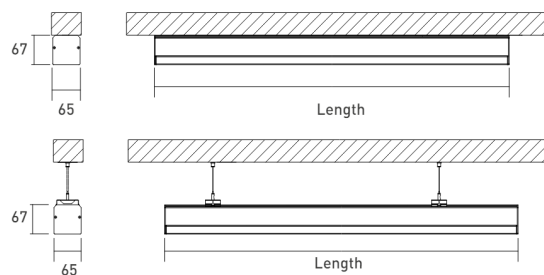
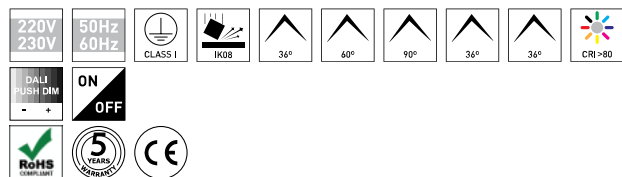
REVO is a tailor-made LED lighting solution for large retail stores such as hypermarkets, warehousing and industrial environments, which is characterized by maximum efficiency, a high flexibility and a short return on investment. It stands out for its differentiating design and its high technology, integrating LED that allow to reach 204lm/W and a state of the art lenses, with optical effects that allow a professional lighting, highlighting the products and reducing the level of glare, providing a high quality and comfortable lighting to look at. Thanks to an effective clipping system, REVO is an evolving trunking light on which you can combine easily Efficiency, High Performance or Blind Cover modules into one main rail according to the local needs, minimizing total cost (low energy consumption, mounting and maintenance costs). The REVO Trunking system made of extruded aluminium has a 5 Year Warranty, is available in suspended or surface mounted version, in ON-OFF or DALI mode, with or without an emergency kit and can be integrated into a Smart Lighting system. You can choose between 4000K or 5000K colour temperature and matte white, matte black or natural anodized aluminium finishing colours. REVO is an ideal solution if you are looking for a versatile and quickmounting Trunking system that fits all the industrial and retail requirements.



<b>LIGHT DISTRIBUTION</b>	Directa
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 203 lm/W
<b>IK</b>	IK08
<b>CRI</b>	CRI->80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**




REVO HIGH PERFORMANCE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
570	19.9	TB, TW	3000K	DA, NF	3818	3360	506XX.0530.830.FI
570	19.9	TB, TW	3000K	DA, NF	3818	3360	506XX.0560.830.FI
570	19.9	TB, TW	3000K	DA, NF	3818	3360	506XX.0590.830.FI
570	19.9	TB, TW	3000K	DA, NF	3818	3360	506XX.05AS.830.FI
570	19.9	TB, TW	3000K	DA, NF	3818	3360	506XX.05DAS.830.FI
570	19.9	TB, TW	3000K	DA, NF	3818	3360	506XX.05XXS.830.FI
570	19.9	TB, TW	4000K	DA, NF	4050	3564	506XX.0530.840.FI
570	19.9	TB, TW	4000K	DA, NF	4050	3564	506XX.0560.840.FI
570	19.9	TB, TW	4000K	DA, NF	4050	3564	506XX.0590.840.FI
570	19.9	TB, TW	4000K	DA, NF	4050	3564	506XX.05AS.840.FI
570	19.9	TB, TW	4000K	DA, NF	4050	3564	506XX.05DAS.840.FI
570	19.9	TB, TW	4000K	DA, NF	4050	3564	506XX.05XXS.840.FI
1130	39.8	TB, TW	3000K	DA, NF	7636	6720	506XX.1130.830.FI
1130	39.8	TB, TW	3000K	DA, NF	7636	6720	506XX.1160.830.FI
1130	39.8	TB, TW	3000K	DA, NF	7636	6720	506XX.1190.830.FI
1130	39.8	TB, TW	3000K	DA, NF	7636	6720	506XX.11AS.830.FI
1130	39.8	TB, TW	3000K	DA, NF	7636	6720	506XX.11DAS.830.FI
1130	39.8	TB, TW	3000K	DA, NF	7636	6720	506XX.11XXS.830.FI
1130	39.8	TB, TW	4000K	DA, NF	8100	7128	506XX.1130.840.FI
1130	39.8	TB, TW	4000K	DA, NF	8100	7128	506XX.1160.840.FI
1130	39.8	TB, TW	4000K	DA, NF	8100	7128	506XX.1190.840.FI
1130	39.8	TB, TW	4000K	DA, NF	8100	7128	506XX.11AS.840.FI
1130	39.8	TB, TW	4000K	DA, NF	8100	7128	506XX.11DAS.840.FI
1130	39.8	TB, TW	4000K	DA, NF	8100	7128	506XX.11XXS.840.FI
1690	59.7	TB, TW	3000K	DA, NF	11454	10080	506XX.1630.830.FI
1690	59.7	TB, TW	3000K	DA, NF	11454	10080	506XX.1660.830.FI
1690	59.7	TB, TW	3000K	DA, NF	11454	10080	506XX.1690.830.FI
1690	59.7	TB, TW	3000K	DA, NF	11454	10080	506XX.16AS.830.FI
1690	59.7	TB, TW	3000K	DA, NF	11454	10080	506XX.16DAS.830.FI
1690	59.7	TB, TW	3000K	DA, NF	11454	10080	506XX.16XXS.830.FI
1690	59.7	TB, TW	4000K	DA, NF	12150	10692	506XX.1630.840.FI
1690	59.7	TB, TW	4000K	DA, NF	12150	10692	506XX.1660.840.FI
1690	59.7	TB, TW	4000K	DA, NF	12150	10692	506XX.1690.840.FI
1690	59.7	TB, TW	4000K	DA, NF	12150	10692	506XX.16AS.840.FI
1690	59.7	TB, TW	4000K	DA, NF	12150	10692	506XX.16DAS.840.FI
1690	59.7	TB, TW	4000K	DA, NF	12150	10692	506XX.16XXS.840.FI
2250	79.6	TB, TW	3000K	DA, NF	15272	13439	506XX.2230.830.FI
2250	79.6	TB, TW	3000K	DA, NF	15272	13439	506XX.2260.830.FI
2250	79.6	TB, TW	3000K	DA, NF	15272	13439	506XX.2290.830.FI
2250	79.6	TB, TW	3000K	DA, NF	15272	13439	506XX.22AS.830.FI
2250	79.6	TB, TW	3000K	DA, NF	15272	13439	506XX.22DAS.830.FI
2250	79.6	TB, TW	3000K	DA, NF	15272	13439	506XX.22XXS.830.FI
2250	79.6	TB, TW	4000K	DA, NF	16200	14256	506XX.2230.840.FI
2250	79.6	TB, TW	4000K	DA, NF	16200	14256	506XX.2260.840.FI
2250	79.6	TB, TW	4000K	DA, NF	16200	14256	506XX.2290.840.FI
2250	79.6	TB, TW	4000K	DA, NF	16200	14256	506XX.22AS.840.FI
2250	79.6	TB, TW	4000K	DA, NF	16200	14256	506XX.22DAS.840.FI
2250	79.6	TB, TW	4000K	DA, NF	16200	14256	506XX.22XXS.840.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX
DALI / Switch Dim ON/OFF	DA NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW




ACCESSORIES

REVO Power Cable	5 m	3 m	1,5 m
3x1,5mm2 - 1,5M	30800265	30800261	30800257
5x1,5mm2 - 1,5M	30800266	30800262	30800258
7x1,5mm2 - 1,5M	30800267	30800263	30800259
9x1,5mm2 - 1,5M	30800268	30800264	30800260

REVO External Profile	White	Black
External profile 1130mm	3651130.TW	3651130.TB

REVO External Profile	White	Black
External profile 1700mm	3651700.TW	3651700.TB

REVO External Profile	White	Black
External profile 570mm	3650570.TW	3650570.TB

	<b>Suspension Kit</b> Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	<b>Silver</b> 80303017.SL 80303018.SL 80303019.SL		
	<b>REVO Blind Cover</b> Blind Cover 1700mm	<b>Textured White</b> 3671700.TW	<b>Textured Black</b> 3671700.TB	
	<b>Revo Wiring</b> Revo Wiring 3wr Revo Wiring 5wr Revo Wiring 7wr Revo Wiring 9wr	-	3WR.10.17 5WR.10.17 7WR.10.17 9WR.10.17	
	<b>End Cap for REVO</b> End Caps for REVO	<b>Textured White</b> 80303060.TW	<b>Textured Black</b> 80303060.TB	<b>Anodized aluminium</b> 80303060.AL
	<b>REVO/TREV Linear Joint</b> REVO/TREV Linear Joint	-	5004-014	
	<b>Mounting Clip</b> Mounting Clip	-	5004-020	
	<b>Emergency kit 150W 1H</b> Emergency kit 150W 1H	-	6080-006	
	<b>Emergency kit 150W 3H</b> Emergency kit 150W 3H	-	6080-007	
	<b>CASAMBI - DALI Interface</b> CASAMBI - DALI Interface	<b>CASAMBI</b> 8030-2590		