

DESCRIPTION

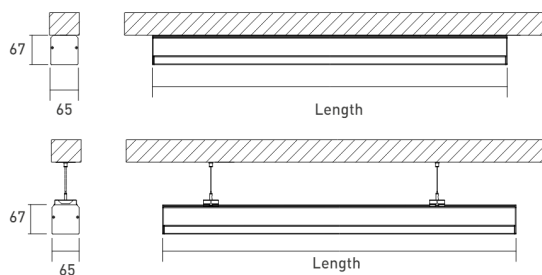
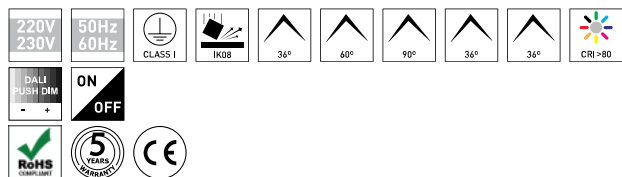
REVO is a tailor-made LED lighting solution for large retail stores such as hypermarkets, warehousing and industrial environments, which is characterized by maximum efficiency, a high flexibility and a short return on investment. It stands out for its differentiating design and its high technology, integrating LED that allow to reach 204lm/W and a state of the art lenses, with optical effects that allow a professional lighting, highlighting the products and reducing the level of glare, providing a high quality and comfortable lighting to look at. Thanks to an effective clipping system, REVO is an evolving trunking light on which you can combine easily Efficiency, High Performance or Blind Cover modules into one main rail according to the local needs, minimizing total cost (low energy consumption, mounting and maintenance costs). The REVO Trunking system made of extruded aluminium has a 5 Year Warranty, is available in suspended or surface mounted version, in ON-OFF or DALI mode, with or without an emergency kit and can be integrated into a Smart Lighting system. You can choose between 4000K or 5000K colour temperature and matte white, matte black or natural anodized aluminium finishing colours. REVO is an ideal solution if you are looking for a versatile and quickmounting Trunking system that fits all the industrial and retail requirements.



LIGHT DISTRIBUTION	Directa
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 180 lm/W
IK	IK08
CRI	CRI->80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY




REVO ADVANCED
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.0530.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.0560.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.0590.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.05AS.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.05DAS.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.05XXS.830.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.0530.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.0560.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.0590.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.05AS.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.05DAS.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.05XXS.840.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.1130.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.1160.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.1190.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.11AS.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.11DAS.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.11XXS.830.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.1130.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.1160.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.1190.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.11AS.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.11DAS.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.11XXS.840.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.1630.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.1660.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.1690.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.16AS.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.16DAS.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.16XXS.830.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.1630.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.1660.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.1690.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.16AS.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.16DAS.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.16XXS.840.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.2230.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.2260.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.2290.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.22AS.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.22DAS.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.22XXS.830.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.2230.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.2260.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.2290.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.22AS.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.22DAS.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.22XXS.840.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
DALI / Switch Dim ON/OFF	DA NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES

	5 m	3 m	1,5 m
<p>REVO Power Cable</p>	3x1,5mm2 - 1,5M	30800265	30800261
	5x1,5mm2 - 1,5M	30800266	30800262
	7x1,5mm2 - 1,5M	30800267	30800263
	9x1,5mm2 - 1,5M	30800268	30800264

	White	Black
<p>REVO External Profile External profile 1130mm</p>	3651130.TW	3651130.TB

	White	Black
<p>REVO External Profile External profile 1700mm</p>	3651700.TW	3651700.TB

	White	Black
<p>REVO External Profile External profile 570mm</p>	3650570.TW	3650570.TB

	Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL		
	REVO Blind Cover Blind Cover 1700mm	Textured White 3671700.TW	Textured Black 3671700.TB	
	Revo Wiring Revo Wiring 3wr Revo Wiring 5wr Revo Wiring 7wr Revo Wiring 9wr	-	3WR.10.17 5WR.10.17 7WR.10.17 9WR.10.17	
	End Cap for REVO End Caps for REVO	Textured White 80303060.TW	Textured Black 80303060.TB	Anodized aluminium 80303060.AL
	REVO/TREV Linear Joint REVO/TREV Linear Joint	-	5004-014	
	Mounting Clip Mounting Clip	-	5004-020	
	Emergency kit 150W 1H Emergency kit 150W 1H	-	6080-006	
	Emergency kit 150W 3H Emergency kit 150W 3H	-	6080-007	
	CASAMBI - DALI Interface CASAMBI - DALI Interface	CASAMBI 8030-2590		