

DESCRIPTION

REVO is an efficient LED lighting solution, ideal for large commercial areas such as supermarkets, storage areas and industrial environments. With its distinctive design and advanced technology, it achieves up to 203 lm/W and guarantees comfortable, high-quality lighting.

It allows flexible configurations with different modules (Efficiency, High Performance or blind cover) on a continuous track, reducing energy, installation and maintenance costs. Available in suspended or surface mounting, with or without emergency kit, and compatible with intelligent lighting systems.

The REVO system, made of extruded aluminium, has 5 years warranty time.


LIGHT DISTRIBUTION	Directa
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF



LED FEATURES

LUMINOUS EFFICIENCY	UP TO 180 lm/W
IK	IK08
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

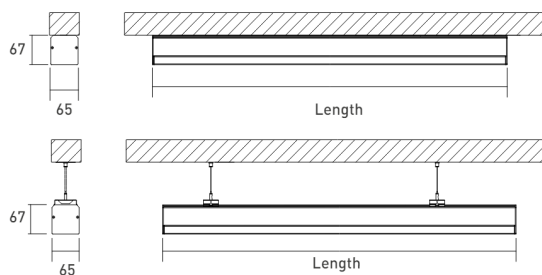

ICONOGRAPHY



REVO ADVANCED
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.0530.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.0560.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.0590.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.05AS.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.05DAS.830.FI
570	18	TB, TW	3000K	DA, NF	3042	2677	505XX.05XXS.830.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.0530.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.0560.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.0590.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.05AS.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.05DAS.840.FI
570	18	TB, TW	4000K	DA, NF	3227	2840	505XX.05XXS.840.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.1130.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.1160.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.1190.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.11AS.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.11DAS.830.FI
1130	36	TB, TW	3000K	DA, NF	6084	5354	505XX.11XXS.830.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.1130.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.1160.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.1190.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.11AS.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.11DAS.840.FI
1130	36	TB, TW	4000K	DA, NF	6454	5680	505XX.11XXS.840.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.1630.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.1660.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.1690.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.16AS.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.16DAS.830.FI
1690	54	TB, TW	3000K	DA, NF	9126	8031	505XX.16XXS.830.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.1630.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.1660.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.1690.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.16AS.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.16DAS.840.FI
1690	54	TB, TW	4000K	DA, NF	9681	8519	505XX.16XXS.840.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.2230.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.2260.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.2290.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.22AS.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.22DAS.830.FI
2250	72	TB, TW	3000K	DA, NF	12168	10708	505XX.22XXS.830.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.2230.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.2260.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.2290.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.22AS.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.22DAS.840.FI
2250	72	TB, TW	4000K	DA, NF	12908	11359	505XX.22XXS.840.FI

SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX
DALI / PUSH Dim	DA
ON/OFF	NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES

REVO Power Cable	5 m	3 m	1,5 m
3x1,5mm2 - 1,5M	30800265	30800261	30800257
5x1,5mm2 - 1,5M	30800266	30800262	30800258
7x1,5mm2 - 1,5M	30800267	30800263	30800259
9x1,5mm2 - 1,5M	30800268	30800264	30800260

REVO External Profile	White	Black
External profile 1130mm	3651130.TW	3651130.TB

REVO External Profile	White	Black
External profile 1690mm	3651700.TW	3651700.TB

REVO External Profile	White	Black
External profile 570mm	3650570.TW	3650570.TB

	Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL		
	REVO Blind Cover Blind Cover 1700mm	Textured White 3671700.TW	Textured Black 3671700.TB	
	Revo Wiring Revo Wiring 3wr Revo Wiring 5wr Revo Wiring 7wr Revo Wiring 9wr	-	3WR.10.17 5WR.10.17 7WR.10.17 9WR.10.17	
	End Cap for REVO End Caps for REVO	Textured White 80303060.TW	Textured Black 80303060.TB	Anodized aluminium 80303060.AL
	REVO/TREV Linear Joint REVO/TREV Linear Joint	-	5004-014	
	Mounting Clip Mounting Clip	-	5004-020	
	Emergency kit 150W 1H Emergency kit 150W 1H	-	6080-006	
	Emergency kit 150W 3H Emergency kit 150W 3H	-	6080-007	
	CASAMBI - DALI Interface CASAMBI - DALI Interface	CASAMBI 8030-2590		