

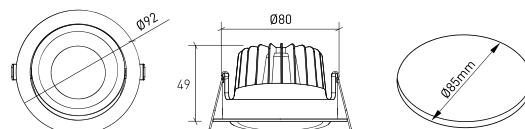
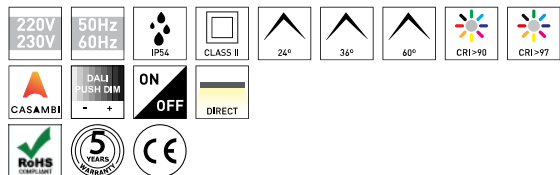
**DESCRIPTION**

This downlight has a textured white or black finish, that reveals its excellent quality and solidness through touch, like if it was sculpted by the famous Auguste Rodin himself. Due to its LED chip having a CRI higher 90, the light emitted shows the true colour of the objects. The 5-year Warranty makes Rodin a long-term investment and depending on its colour temperature and beam angle, its lumens may vary according to the table next to the product code.

<b>MOUNTING</b>	Recessed
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI / PUSH Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 161 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**RODIN DOWNLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
92	8,1	TB, TW	CS, DA, NF	24, 36, 60	1203	1023	2700K	5325XX.BA.927.FI
92	8,1	TB, TW	CS, DA, NF	24, 36, 60	1244	1057	3000K	5325XX.BA.930.FI
92	8,1	TB, TW	CS, DA, NF	24, 36, 60	1300	1105	4000K	5325XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI / PUSH Dim	DA	Textured White	TW	36°	36
ON/OFF	NF			60°	60

**RODIN DOWNLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
92	8,8	TB, TW	CS, DA, NF	24, 36, 60	918	780	2700K	5325XX.BA.9727.FI
92	8,8	TB, TW	CS, DA, NF	24, 36, 60	980	833	3000K	5325XX.BA.9730.FI
92	8,8	TB, TW	CS, DA, NF	24, 36, 60	1033	878	4000K	5325XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI / PUSH Dim	DA	Textured White	TW	36°	36
ON/OFF	NF			60°	60