

DESCRIPTION

This track light was designed to provide high luminous performance in a small sized fixture. Measuring only 55 mm in diameter, it incorporates a heatsink with excellent thermal conductivity. It is ideal for projects that require high levels of luminous quality, highlighting products or special spaces. The ROSS was specially developed for use with a lowvoltage (48V) track adapter and is also available with an inTrack driver version for universal 3-circuit tracks (230V), as well as ceiling-mounted solutions in surface-mounted and recessed versions.


LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 139 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

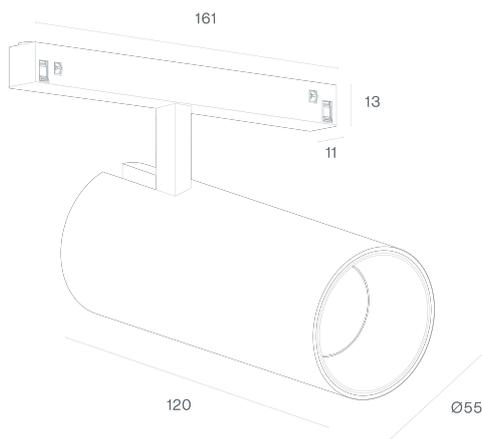

ICONOGRAPHY

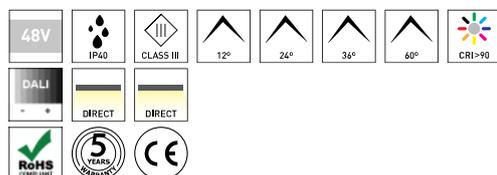

ROSS 48V MICRO
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
120	16.6	TB, TW	DL	12, 24, 36, 60	2052	1744	2700K	552XX.12.927.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2052	1744	2700K	552XX.24.927.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2052	1744	2700K	552XX.36.927.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2052	1744	2700K	552XX.60.927.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2185	1857	3000K	552XX.12.930.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2185	1857	3000K	552XX.24.930.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2185	1857	3000K	552XX.36.930.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2185	1857	3000K	552XX.60.930.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2300	1955	4000K	552XX.12.940.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2300	1955	4000K	552XX.24.940.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2300	1955	4000K	552XX.36.940.FI
120	16.6	TB, TW	DL	12, 24, 36, 60	2300	1955	4000K	552XX.60.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	12°	12
		Textured White	TW	24°	24
				36°	36
				60°	60