

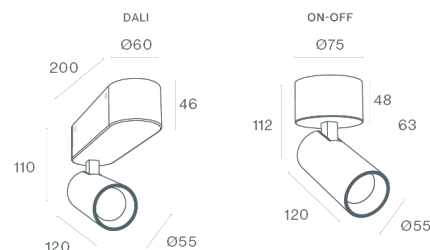
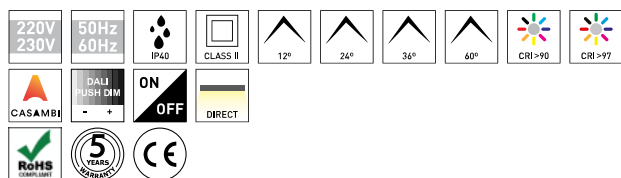
**DESCRIPTION**

This Spotlight was designed to provide high luminous performance into a small product. With only 55mm diameter, it integrates a heatsink of high thermal conductivity. This Spotlight is ideal for projects where high levels of quality light are necessary, highlighting products or special spaces. The ROSS has been specially designed to be used with an adapter in low voltage magnetic rails but it is also available with inTrack driver version for universal 3 circuit rail of 230V. Recently, two new solutions for the use of this lighting fixture has been added: Surface and recessed.

<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, CASAMBI, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 95 lm/W
<b>CRI</b>	CRI->90, CRI->97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ROSS SPOTLIGHT SURFACE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5459XX.12.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5459XX.24.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5459XX.36.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5459XX.60.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5459XX.12.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5459XX.24.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5459XX.36.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5459XX.60.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5459XX.12.940.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5459XX.24.940.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5459XX.36.940.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5459XX.60.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5450XX.12.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5450XX.24.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5450XX.36.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5450XX.60.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5450XX.12.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5450XX.24.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5450XX.36.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5450XX.60.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5450XX.12.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5450XX.24.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5450XX.36.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5450XX.60.940.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			36°	36
				60°	60


**ROSS SPOTLIGHT SURFACE  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->97**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5452XX.12.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5452XX.24.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5452XX.36.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5452XX.60.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5452XX.12.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5452XX.24.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5452XX.36.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5452XX.60.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5452XX.12.9740.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5452XX.24.9740.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5452XX.36.9740.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5452XX.60.9740.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			36°	36
				60°	60