

DESCRIPTION

This track light was designed to provide high luminous performance into a small product. With only 55mm diameter, it integrates a heatsink of high thermal conductivity. This track light is ideal for projects where high levels of quality light are necessary, highlighting products or special spaces. The ROSS has been specially designed to be used with an adapter in low voltage Universal rails but it is also available with inTrack driver version for universal 3 circuit rail of 230V. Recently, two new solutions for the use of this lighting fixture has been added: Surface and recessed.


MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 95 lm/W
CRI	CRI->90, CRI->97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

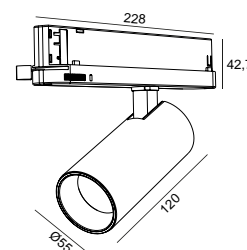

ICONOGRAPHY

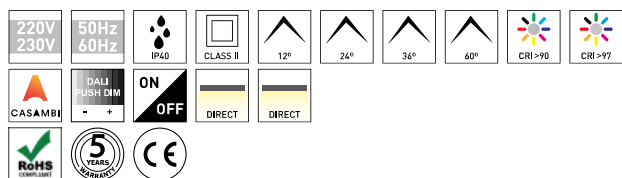

ROSS UNIVERSAL 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5413XX.12.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5413XX.24.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5413XX.36.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1637	1391	2700K	5413XX.60.927.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5413XX.12.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5413XX.24.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5413XX.36.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1671	1420	3000K	5413XX.60.930.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5413XX.12.940.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5413XX.24.940.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5413XX.36.940.FI
120	11.4	TB, TW	CS, DA, NF	12, 24, 36, 60	1785	1518	4000K	5413XX.60.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5402XX.12.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5402XX.24.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5402XX.36.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2052	1744	2700K	5402XX.60.927.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5402XX.12.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5402XX.24.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5402XX.36.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2185	1857	3000K	5402XX.60.930.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5402XX.12.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5402XX.24.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5402XX.36.940.FI
120	16.6	TB, TW	CS, DA, NF	12, 24, 36, 60	2300	1955	4000K	5402XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			36°	36
				60°	60


ROSS UNIVERSAL 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5467XX.12.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5467XX.24.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5467XX.36.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1700	1445	2700K	5467XX.60.9727.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5467XX.12.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5467XX.24.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5467XX.36.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1815	1542	3000K	5467XX.60.9730.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5467XX.12.9740.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5467XX.24.9740.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5467XX.36.9740.FI
120	19.1	TB, TW	CS, DA, NF	12, 24, 36, 60	1910	1624	4000K	5467XX.60.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			36°	36
				60°	60

ACCESSORIES

	Track ON/OFF Susp./Surf. ON/OFF Track 1m Black	UP1459429-1
	ON/OFF Track 1m White	UP1459102-1
	ON/OFF Track 2m Black	UP1459429
	ON/OFF Track 2m White	UP1459102
	Track DALI Susp./Surf. DALI Track 1m Black	UP1459439-1
	DALI Track 1m White	UP1459107-1
	DALI Track 2m Black	UP1459439
	DALI Track 2m White	UP1459107
	Recess. Track ON/OFF ON/OFF Rec. Track 1m BL	UP1459312-1
	ON/OFF Rec. Track 1m WH	UP1459112-1
	ON/OFF Rec. Track 2m BL	UP1459312
	ON/OFF Rec. Track 2m WH	UP1459112
	Recessed Track DALI DALI Rec. Track 1m BL	UP1459317-1
	DALI Rec. Track 1m WH	UP1459117-1
	DALI Rec. Track 2m BL	UP1459317
	DALI Rec. Track 2m WH	UP1459117