

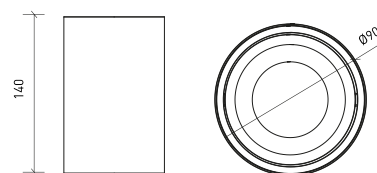
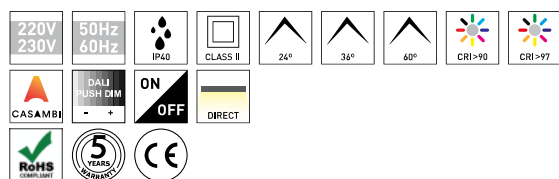
**DESCRIPTION**

Roxane is a cylindrical light fitting, composed of aluminium and textured white or black finish, which gives it a graceful and modern design. These aesthetic features and its high CRI, put this LED luminaire into the products category that can be included in any architectural project. Suspended or surface mounted, Roxane luminaire is easy to install and has a 24°, 36° or 60° beam angle.

<b>MOUNTING</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI / PUSH Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 161 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ROXANE SURFACE SPOTLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
140	8,1	TB, TW	CS, DA, NF	24, 36, 60	1211	1030	2700K	5332XX.BA.927.FI
140	8,1	TB, TW	CS, DA, NF	24, 36, 60	1244	1057	3000K	5332XX.BA.930.FI
140	8,1	TB, TW	CS, DA, NF	24, 36, 60	1300	1105	4000K	5332XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI / PUSH Dim	DA	Textured White	TW	36°	36
ON/OFF	NF			60°	60


**ROXANE SURFACE SPOTLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
140	8,8	TB, TW	CS, DA, NF	24, 36, 60	918	780	2700K	5332XX.BA.9727.FI
140	8,8	TB, TW	CS, DA, NF	24, 36, 60	980	833	3000K	5332XX.BA.9730.FI
140	8,8	TB, TW	CS, DA, NF	24, 36, 60	1033	878	4000K	5332XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI / PUSH Dim	DA	Textured White	TW	36°	36
ON/OFF	NF			60°	60