

DESCRIPTION

Roxane is a cylindrical light fitting, composed of aluminium and textured white or black finish, which gives it a graceful and modern design. These aesthetic features and its high CRI, put this LED luminaire into the products category that can be included in any architectural project. Suspended or surface mounted, Roxane luminaire is easy to install and has a 24°, 36° or 60° beam angle.


| | |
|---------------------------|------------------------------------|
| MOUNTING | Surface |
| LIGHT DISTRIBUTION | Direct |
| WARRANTY | 5 Years |
| FINISHING | Textured Black, Textured White |
| CONTROL | CASAMBI, DALI / Switch Dim, ON/OFF |

LED FEATURES


| | |
|-----------------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 161 lm/W |
| CRI | CRI→90, CRI→97 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |



TECHNICAL DRAWING

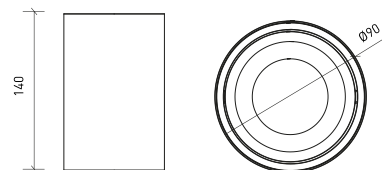

ICONOGRAPHY

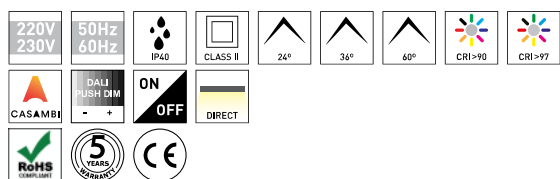

**ROXANE SURFACE SPOTLIGHT
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

| LENGTH | POWER | FINISHING | CONTROLTYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|-------------|------------|------------|--------------|-------------|------------------|
| 140 | 8,1 | TB, TW | CS, DA, NF | 24, 36, 60 | 1211 | 1030 | 2700K | 5332XX.BA.927.FI |
| 140 | 8,1 | TB, TW | CS, DA, NF | 24, 36, 60 | 1244 | 1057 | 3000K | 5332XX.BA.930.FI |
| 140 | 8,1 | TB, TW | CS, DA, NF | 24, 36, 60 | 1300 | 1105 | 4000K | 5332XX.BA.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROLTYPE | XX | FINISHING | FI | BEAM ANGLE | BA |
|-------------------|----|----------------|----|------------|----|
| CASAMBI | CS | Textured Black | TB | 24° | 24 |
| DALI / Switch Dim | DA | Textured White | TW | 36° | 36 |
| ON/OFF | NF | | | 60° | 60 |



**ROXANE SURFACE SPOTLIGHT
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

| LENGTH | POWER | FINISHING | CONTROLTYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|-------------|------------|------------|--------------|-------------|-------------------|
| 140 | 8,8 | TB, TW | CS, DA, NF | 24, 36, 60 | 918 | 780 | 2700K | 5332XX.BA.9727.FI |
| 140 | 8,8 | TB, TW | CS, DA, NF | 24, 36, 60 | 980 | 833 | 3000K | 5332XX.BA.9730.FI |
| 140 | 8,8 | TB, TW | CS, DA, NF | 24, 36, 60 | 1033 | 878 | 4000K | 5332XX.BA.9740.FI |

SELECT YOUR PREFERRED OPTION

| CONTROLTYPE | XX | FINISHING | FI | BEAM ANGLE | BA |
|-------------------|----|----------------|----|------------|----|
| CASAMBI | CS | Textured Black | TB | 24° | 24 |
| DALI / Switch Dim | DA | Textured White | TW | 36° | 36 |
| ON/OFF | NF | | | 60° | 60 |