

## DESCRIPTION

The SLIM WAVE is presented with the LOW GLARE & OPAL or LOW GLARE & MICROPRISMATIC diffuser combination, emitting a high-quality light, thanks to the high Color Rendering Index (CRI→90) and a low level of glare, providing a pleasant and comfortable environment.

The SLIM WAVE is a luminaire that adapts perfectly to the needs and preferences of your project.

With about 3000lm, it is available in 3000K and 4000K color temperatures, three textured finishings, white, black, or silver, and offers a 5-year guarantee.


It's much more than just a luminaire - it's a statement of style and sophistication for any space.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-240V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured black and white, Textured Silver, Textured White, Textured white and black
CONTROL	DALI / Switch Dim, ON/OFF

## LED FEATURES

LUMINOUS EFFICIENCY	UP TO 152 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

## ICONOGRAPHY



## SLIM WAVE OPAL PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1700	28	TB, TBW, TS, TW, TWB	3000K	DA, NF	4039	2944	170XX.1709.930.FI
1700	28	TB, TBW, TS, TW, TWB	4000K	DA, NF	4248	3096	170XX.1709.940.FI

## SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured black and white	TBW
				Textured Silver	TS
				Textured White	TW
				Textured white and black	TWB

## ACCESSORIES


	Suspension Kit	Silver
	Suspension kit 1,5m (1un)	80303017.SL
	Suspension kit 3 m (1un)	80303018.SL
	Suspension kit 5 m (1un)	80303019.SL

	Ceiling Rose Recessed	Textured White	Textured Silver	Textured Black
	Ceiling Rose Recessed	80303020.TW		
	Ceiling Rose Recessed	80303020.TS		
	Ceiling Rose Recessed	80303020.TB		

	Ceiling Rose Surface	Textured White	Textured Silver	Textured Black
	Ceiling Rose Surface	80303021.TW		
	Ceiling Rose Surface	80303021.TS		



## TECHNICAL DRAWING

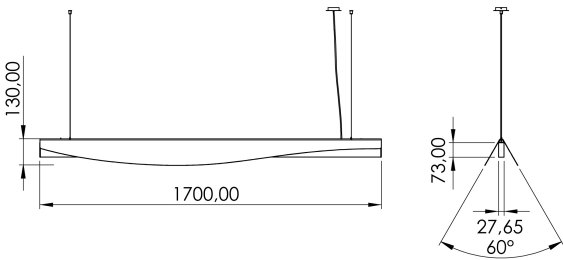

Ceiling Rose Surface

80303021.TB



Power Cable 0,75	ON/Off	DALI Push
Power Cable 1.5m	80303001	
Power Cable 1.5m	80303004	
Power Cable 3m	80303002	
Power Cable 3m	80303005	
Power Cable 5m	80303003	
Power Cable 5m	80303006	