

DESCRIPTION

The SLIM WAVE is presented with the LOW GLARE & OPAL or LOW GLARE & MICROPRISMATIC diffuser combination, emitting a high-quality light, thanks to the high Color Rendering Index (CRI→90) and a low level of glare, providing a pleasant and comfortable environment.

The SLIM WAVE is a luminaire that adapts perfectly to the needs and preferences of your project.


With about 3000lm, it is available in 3000K and 4000K color temperatures, three textured finishings, white, black, or silver, and offers a 5-year guarantee.

It's much more than just a luminaire - it's a statement of style and sophistication for any space.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-240V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured black and white, Textured Silver, Textured White, Textured white and black
CONTROL	DALI / Switch Dim, ON/OFF




TECHNICAL DRAWING

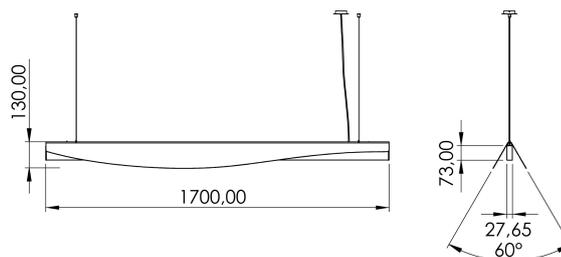

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 152 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY



SLIM WAVE OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1700	28	TB, TBW, TS, TW, TWB	3000K	DA, NF	4039	2944	170XX.1709.930.FI
1700	28	TB, TBW, TS, TW, TWB	4000K	DA, NF	4248	3096	170XX.1709.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured black and white	TBW
				Textured Silver	TS
				Textured White	TW
				Textured white and black	TWB

ACCESSORIES

	Suspension Kit Suspension kit 1,5m (1un) Suspension kit 3 m (1un) Suspension kit 5 m (1un)	Silver 80303017.SL 80303018.SL 80303019.SL
	Ceiling Rose Recessed Ceiling Rose Recessed	Textured White 80303020.TW Textured Silver 80303020.TS Textured Black 80303020.TB
	Ceiling Rose Surface Ceiling Rose Surface	Textured White 80303021.TW Textured Silver 80303021.TS Textured Black 80303021.TB



Power Cable 0,75
Power Cable 1.5m
Power Cable 3m
Power Cable 5m

ON/Off	DALI Push
80303001	80303004
80303002	80303005
80303003	80303006