


DESCRIPTION

The SOFTIS is a highly efficient luminaire with up to 211lm/W. This luminaire is the ideal solution for lighting large areas with very different purposes, such as parking lots, technical areas, industrial areas, hypermarkets, assembly lines and sports halls.


LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
CONTROL	DALI / Switch Dim, ON/OFF

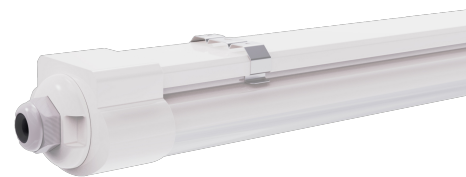


LED FEATURES

IK	IK09
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

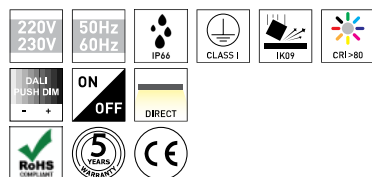

TECHNICAL DRAWING

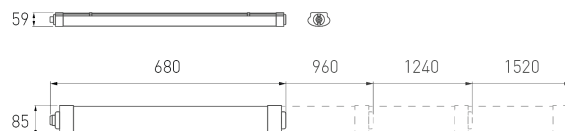

SOFTIS W/ THROUGH WIRING PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
680	13.3	DA, NF	120	2698	2293	3000K	761XX.06.830
680	13.3	DA, NF	120	2818	2395	4000K	761XX.06.840
960	20	DA, NF	120	4047	3440	3000K	761XX.09.830
960	20	DA, NF	120	4227	3593	4000K	761XX.09.840
1240	26.7	DA, NF	120	5396	4587	3000K	761XX.12.830
1240	26.7	DA, NF	120	5636	4791	4000K	761XX.12.840
1520	33.4	DA, NF	120	6745	5733	3000K	761XX.15.830
1520	33.4	DA, NF	120	7045	5988	4000K	761XX.15.840

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
DALI / Switch Dim	DA
ON/OFF	NF

ACCESSORIES



Suspension Kit	Silver
Suspension kit 1,5m (1un)	80303017.SL
Suspension kit 3 m (1un)	80303018.SL
Suspension kit 5 m (1un)	80303019.SL



Emergency kit 150W 1H	-
Emergency kit 150W 1H	6080-006



Emergency kit 150W 3H	-
Emergency kit 150W 3H	6080-007