

DESCRIPTION

The range of SPAR track lights promises to innovate the technical lighting of retail stores.

This new product collection consists of more efficient track lights than others in the market, with much higher colour rendering indexes (CRI) with LED chips to light specific locations such as markets, bakeries, restaurants, butcheries or fish markets.

This range of track lights, when installed in the right location, highlight the features of the products and, therefore, help to stimulate the goods acquisition.

SPAR GOLD

The SPAR Gold chip emits a warm and bright light, ideal for highlighting the colours of the different products in the jewelry stores.

SPAR FRESH MEAT & MEAT+

This group is ideal to put in butcheries or supermarkets. While the SPAR Fresh Meat chip highlights the red meat, giving it a fresh and appetizing look, SPAR Meat + highlights the whiter flesh colours. This latest track light can also be installed in restaurants or grills, because its chip also gives a tasty look to the cooked food.

SPAR GOLD+

This track light has a chip that emits light with a light brown hue and aims to highlight the products sold in bakeries and pastry shops, giving them an oven-fresh and delicious look.

SPAR FISH

As the name suggests, the chip of this SPAR is suitable for fish markets, fishing docks or supermarkets. This chip highlights the blue colour of the products, giving a fresh aspect to the fish, which is the characteristic most appreciated by the customer.

SPAR ART

SPAR spotlight offers the high quality of light that is needed for displaying high value exhibits. Unique full spectrum technology provides excellent colour rendering. An average value of CRI 97 with outstanding colour consistency (MacAdam 2).

SPAR FASHION

SPAR FASHION light is ideal for the sparkling display of fashion. Targeted specifically for lighting in the retail sector, generates brilliant colours and pleasant warm tones. Completely without UV light, it's intensive and colour-true.

SPAR PURE WHITE


SPAR PURE WHITE light colour brings out white tones to create a rich colour effect giving clothes a vivid appearance thanks to a spectrum which is below the Planck curve.

MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 92,369747899 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

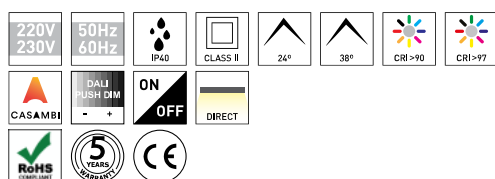



SPAR TECHNICAL 29,8W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
194	29.8	TB, TW	CS, DA, NF	24, 38	2642	2435	4000K	387XX.24.940FM.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2642	2556	4000K	387XX.38.940FM.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2642	2435	4000K RED	387XX.24.940FM.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2642	2556	4000K RED	387XX.38.940FM.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2646	2438	2700K	386XX.24.927M.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2646	2560	2700K	386XX.38.927M.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2646	2438	2700K RED	386XX.24.927M.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2646	2560	2700K RED	386XX.38.927M.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2748	2532	2400K	384XX.24.924G.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	2748	2659	2400K	384XX.38.924G.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4007	3693	3250K	390XX.24.932F.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4007	3877	3250K	390XX.38.932F.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4038	3721	2700K	385XX.24.927G.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4038	3907	2700K	385XX.38.927G.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4235	3903	3000K	391XX.24.930P.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4235	4098	3000K	391XX.38.930P.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4349	4008	6500K	388XX.24.965F.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4349	4208	6500K	388XX.38.965F.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4411	4065	4000K	391XX.24.940P.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	4411	4268	4000K	391XX.38.940P.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
CASAMBI	CS
DALI / Switch Dim	DA
ON/OFF	NF

FINISHING	FI
Textured Black	TB
Textured White	TW

BEAM ANGLE	BA
24°	24
38°	38



SPAR TECHNICAL 29,8W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
194	29.8	TB, TW	CS, DA, NF	24, 38	3808	3509	3100K	389XX.24.931A.FI
194	29.8	TB, TW	CS, DA, NF	24, 38	3808	3685	3100K	389XX.38.931A.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
CASAMBI	CS
DALI / Switch Dim	DA
ON/OFF	NF

FINISHING	FI
Textured Black	TB
Textured White	TW

BEAM ANGLE	BA
24°	24
38°	38

ACCESSORIES



Track ON/OFF Susp./Surf.	
ON/OFF Track 1m Black	UP1459302-1
ON/OFF Track 1m White	UP1459102-1
ON/OFF Track 2m Black	UP1459302
ON/OFF Track 2m White	UP1459102



Track DALI Susp./Surf.	
DALI Track 1m Black	UP1459307-1
DALI Track 1m White	UP1459107-1
DALI Track 2m Black	UP1459307
DALI Track 2m White	UP1459107



Recess. Track ON/OFF	
ON/OFF Rec. Track 1m BL	UP1459312-1
ON/OFF Rec. Track 1m WH	UP1459112-1
ON/OFF Rec. Track 2m BL	UP1459312
ON/OFF Rec. Track 2m WH	UP1459112



Recessed Track DALI	
DALI Rec. Track 1m BL	UP1459317-1
DALI Rec. Track 1m WH	UP1459117-1
DALI Rec. Track 2m BL	UP1459317
DALI Rec. Track 2m WH	UP1459117