

DESCRIPTION

The range of SPAR track lights promises to innovate the technical lighting of retail stores. This new product collection consists of more efficient track lights than others in the market, with much higher colour rendering indexes (CRI) with LED chips to light specific locations such as markets, bakeries, restaurants, butcheries or fish markets. This range of track lights, when installed in the right location, highlight the features of the products and, therefore, help to stimulate the goods acquisition.


MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 98 lm/W
CRI	CRI->90, CRI->97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING



ICONOGRAPHY

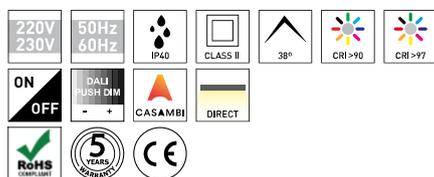

SPAR EFF. UNIVERSAL 24W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
194	24.5	TB, TW	CS, DA, NF	38	3136	2666	2700K	5445XX.38.927.FI
194	24.5	TB, TW	CS, DA, NF	38	3234	2749	3000K	5445XX.38.930.FI
194	24.5	TB, TW	CS, DA, NF	38	3479	2957	4000K	5445XX.38.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	38°	38
DALI / Switch Dim	DA	Textured White	TW		
ON/OFF	NF				



SPAR EFF. UNIVERSAL 24W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
194	25.6	TB, TW	CS, DA, NF	38	2511	2134	2700K	5469XX.38.9727.FI
194	25.6	TB, TW	CS, DA, NF	38	2664	2265	3000K	5469XX.38.9730.FI
194	25.6	TB, TW	CS, DA, NF	38	2818	2395	4000K	5469XX.38.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	38°	38
DALI / Switch Dim	DA	Textured White	TW		
ON/OFF	NF				

ACCESSORIES

	Track ON/OFF Susp./Surf.	
	ON/OFF Track 1m White	UP1459102-1
	ON/OFF Track 2m White	UP1459102
	SEM DescAbr - UP1459429	UP1459429
	SEM DescAbr - UP1459429-1	UP1459429-1
	Track DALI Susp./Surf.	
	DALI Track 1m White	UP1459107-1
	DALI Track 2m White	UP1459107
	SEM DescAbr - UP1459439	UP1459439

SEM DescAbr - UP1459439-1      UP1459439-1



Recess. Track ON/OFF  
 ON/OFF Rec. Track 1m BL      UP1459312-1  
 ON/OFF Rec. Track 1m WH      UP1459112-1  
 ON/OFF Rec. Track 2m BL      UP1459312  
 ON/OFF Rec. Track 2m WH      UP1459112



Recessed Track DALI  
 DALI Rec. Track 1m BL      UP1459317-1  
 DALI Rec. Track 1m WH      UP1459117-1  
 DALI Rec. Track 2m BL      UP1459317  
 DALI Rec. Track 2m WH      UP1459117