

DESCRIPTION

The range of SPAR track lights promises to innovate the technical lighting of retail stores. This new product collection consists of more efficient track lights than others in the market, with much higher colour rendering indexes (CRI) with LED chips to light specific locations such as markets, bakeries, restaurants, butcheries or fish markets. This range of track lights, when installed in the right location, highlight the features of the products and, therefore, help to stimulate the goods acquisition.


MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 95 lm/W
CRI	CRI->90, CRI->97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING



ICONOGRAPHY

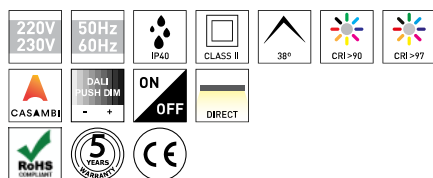

SPAR EFF. UNIVERSAL 29W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
194	28.4	TB, TW	CS, DA, NF	38	3522	2993	2700K	5446XX.38.927.FI
194	28.4	TB, TW	CS, DA, NF	38	3607	3066	3000K	5446XX.38.930.FI
194	28.4	TB, TW	CS, DA, NF	38	3834	3259	4000K	5446XX.38.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	38°	38
DALI / Switch Dim	DA	Textured White	TW		
ON/OFF	NF				

SPAR EFF. UNIVERSAL 29W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
194	29.8	TB, TW	CS, DA, NF	38	2835	2410	2700K	5470XX.38.9727.FI
194	29.8	TB, TW	CS, DA, NF	38	3014	2562	3000K	5470XX.38.9730.FI
194	29.8	TB, TW	CS, DA, NF	38	3193	2714	4000K	5470XX.38.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	38°	38
DALI / Switch Dim	DA	Textured White	TW		
ON/OFF	NF				

ACCESSORIES

	Track ON/OFF Susp./Surf.	
	ON/OFF Track 1m White	UP1459102-1
	ON/OFF Track 2m White	UP1459102
	SEM DescAbr - UP1459429	UP1459429
	SEM DescAbr - UP1459429-1	UP1459429-1
	Track DALI Susp./Surf.	
	DALI Track 1m White	UP1459107-1
	DALI Track 2m White	UP1459107
	SEM DescAbr - UP1459439	UP1459439

SEM DescAbr - UP1459439-1

UP1459439-1



Recess. Track ON/OFF
ON/OFF Rec. Track 1m BL
ON/OFF Rec. Track 1m WH
ON/OFF Rec. Track 2m BL
ON/OFF Rec. Track 2m WH

UP1459312-1
UP1459112-1
UP1459312
UP1459112



Recessed Track DALI
DALI Rec. Track 1m BL
DALI Rec. Track 1m WH
DALI Rec. Track 2m BL
DALI Rec. Track 2m WH

UP1459317-1
UP1459117-1
UP1459317
UP1459117