

DESCRIPTION

One of the lighting trends is the trimless downlights, aluminium light fittings without trims, perfect to recess in false ceilings. Brilumen introduces you this range of products, indented or with tube, suitable for ambient lighting of any room that requires discrete luminaires which do not change the ceiling aesthetics, but at the same time are modern with advanced technology, and effectively illuminate the entire environment.


| | |
|--------------------|------------------------------------|
| MOUNTING TYPE | Recessed |
| LIGHT DISTRIBUTION | Directa |
| WARRANTY | 5 Years |
| FINISHING | Textured White |
| CONTROL | CASAMBI, DALI / Switch Dim, ON/OFF |

LED FEATURES


| | |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 153 lm/W |
| CRI | CRI->90 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |



TECHNICAL DRAWING

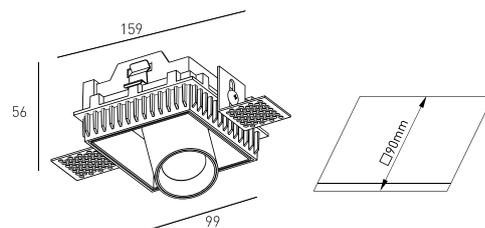

ICONOGRAPHY

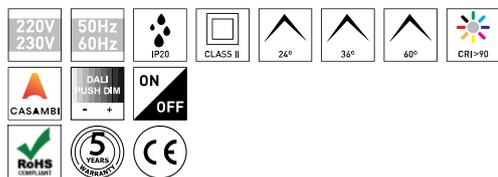

**SPITZER TRIM. DOWNLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

| LENGTH | POWER | FINISHING | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|--------------|------------|------------|--------------|-------------|------------------|
| 88 | 6 | TW | CS, DA, NF | 24, 36, 60 | 821 | 698 | 2700K | 5338XX.BA.927.FI |
| 88 | 6 | TW | CS, DA, NF | 24, 36, 60 | 857 | 728 | 3000K | 5338XX.BA.930.FI |
| 88 | 6 | TW | CS, DA, NF | 24, 36, 60 | 910 | 774 | 4000K | 5338XX.BA.940.FI |

**SELECT YOUR PREFERRED
OPTION**

| CONTROL TYPE | XX | FINISHING | FI | BEAM ANGLE | BA |
|-------------------|----|----------------|----|------------|----|
| CASAMBI | CS | Textured White | TW | 24° | 24 |
| DALI / Switch Dim | DA | | | 36° | 36 |
| ON/OFF | NF | | | 60° | 60 |