



**DESCRIPTION**

When the night hides the light, light up the stars with the Brilumen's spotlight range (Tinker Bell & Kyoto) and provide a beautiful light to your room, making it stunning. Thanks to its small size, with this range it's possible to create numerous designs on the ceiling or wall, and with a colour rendering index higher than 85. Due to its textured white finish and high IP rating, this versatile product range can be installed in numerous locations, working as ambient light and complementing the remaining light fittings, or even as a presence light in halls, lifts, etc.

**POWER SUPPLY** 2.8V / 50-60 Hz

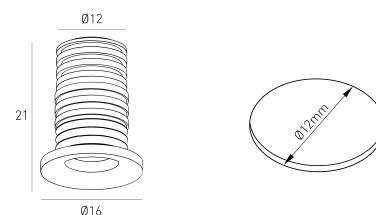

**ICONOGRAPHY**

**TECHNICAL DRAWING**

**TINKER BELL SPOTLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85**


LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
1	1	TW	NF	50	120	40	3000K	340.85.50.30.FI
1	1	TW	NF	50	125	45	4000K	340.85.50.40.FI


SELECT YOUR PREFERRED  
OPTION


CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
ON/OFF	NF	Textured White	TW	50°	50


**ACCESSORIES**

 **Waterproof box**  
Waterproof box SEM TITULO - 4080-1030



 **Output cable gland**  
Output cable gland SEM TITULO - 4080-1031

 **Cover for waterproof box**  
Cover for waterproof box SEM TITULO - 4080-1033

 **LED Driver 6W 350mA**  
LED Driver 6W 350mA SEM TITULO - 8015-0224

 **LED Driver 350mA**  
LED Driver 350mA SEM TITULO - 8015-0226

**Distributor with 6 output**  
Distributor with 6 output SEM TITULO - 8030-0004



Distributor shunt  
Distributor shunt

SEM TITULO -  
8030-0008