


DESCRIPTION

When the night hides the light, light up the stars with the Brilumen's spotlight range (Tinker Bell & Kyoto) and provide a beautiful light to your room, making it stunning. Thanks to its small size, with this range it's possible to create numerous designs on the ceiling or wall, and with a colour rendering index higher than 85. Due to its textured white finish and high IP rating, this versatile product range can be installed in numerous locations, working as ambient light and complementing the remaining light fittings, or even as a presence light in halls, lifts, etc.


POWER SUPPLY 2.8V / 50-60 Hz

LED FEATURES

ICONOGRAPHY



TECHNICAL DRAWING

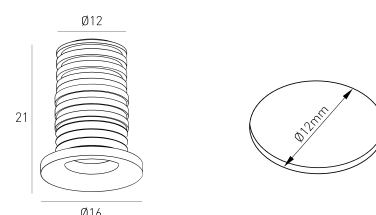

TINKER BELL SPOTLIGHT PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
	1	TW	NF	50	120	40	3000K	340.85.50.30.FI
	1	TW	NF	50	125	45	4000K	340.85.50.40.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE
ON/OFF

XX
NF

FINISHING
Textured White

FI
TW

BEAM ANGLE
50°

BA
50

ACCESSORIES



Waterproof box
Waterproof box

SEM TITULO -
4080-1030



Output cable gland
Output cable gland

SEM TITULO -
4080-1031



Cover for waterproof box
Cover for waterproof box

SEM TITULO -
4080-1033



LED Driver 6W 350mA
LED Driver 6W 350mA

SEM TITULO -
8015-0224





LED Driver 350mA
LED Driver 350mA

SEM TITULO -
8015-0226

Distributor with 6 output
Distributor with 6 output

SEM TITULO -
8030-0004



Distributor shunt	SEM TITULO -
Distributor shunt	8030-0008