


DESCRIPTION

When the night hides the light, light up the stars with the Brilumen's spotlight range (Tinker Bell & Kyoto) and provide a beautiful light to your room, making it stunning. Thanks to its small size, with this range it's possible to create numerous designs on the ceiling or wall, and with a colour rendering index higher than 85. Due to its textured white finish and high IP rating, this versatile product range can be installed in numerous locations, working as ambient light and complementing the remaining light fittings, or even as a presence light in halls, lifts, etc.


POWER SUPPLY 220-230V / 50-60 Hz



ICONOGRAPHY

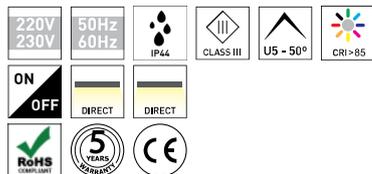

TECHNICAL DRAWING

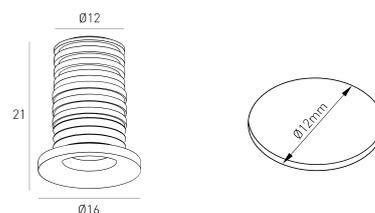

**TINKER BELL SPOTLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
16	1	TW	NF	50	120	40	3000K	340.85.50.30.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE XX
ON/OFF NF

FINISHING FI
Textured White TW

BEAM ANGLE BA
50° 50

ACCESSORIES

	Waterproof box Waterproof box	-	4080-1030
	Output cable gland Output cable gland	-	4080-1031
	Cover for waterproof box Cover for waterproof box	-	4080-1033
	Driver (3-5 luminaires) Driver (3-5 luminaires)	-	8015-0224
	Driver (1-3 luminaires) Driver (1-3 luminaires)	-	8015-0226
	Distributor with 6 output Distributor with 6 output	SEM TITULO -	8030-0004



Distributor shunt
Distributor shunt

SEM TITULO -
8030-0008