

DESCRIPTION


NOTICE: Product discontinued. Limited to existing stock. Please contact us!

Brilumen features a collection of versatile, modern and stylish wall light fittings and which, depending on the design, beam angle and lumens, are suitable for different types of outdoor areas. If the goal is to light both up and down, Marley, Miller and Tosh are the best option, not forgetting that this last wall light has an optional reflector that allows you to close the beam angle. If you want to get a linear light line, the Wailer 16W is the right light fitting. However, if you are looking for a wall lighting to light a pathway, the recessed Levy 4W completes the goal efficiently. These products have an IP54 and are available in dark grey finish.

MOUNTING TYPE	Surface
DISTRIBUICAOLUZ	Directa
POWER SUPPLY	230 VAC / 50/60 Hz
WARRANTY	2 Years
FINISHING	TG
CONTROL	ON/OFF



TECHNICAL DRAWING

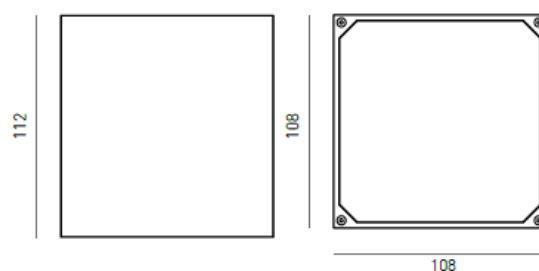

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 86 lm/W
CRI	CRI→80
LIFESPAN	30000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG0

ICONOGRAPHY



 TOSH 2X8W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80


LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
108	16	TG	NF	20	1320	951	3000K	506.80.BA.30
108	16	TG	NF	20	1373	990	4000K	506.80.BA.40

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX
ON/OFF	NF

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo

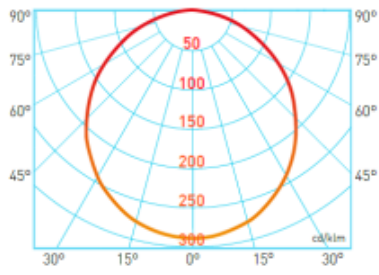

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

ØDIE 24W / 1000K CRI90 1120MM