

DESCRIPTION

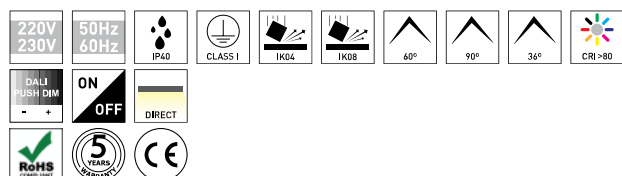
Brilumen presents TREV, a tailor-made LED lighting solution for large retail stores such as hypermarkets, warehousing and industrial environments, which is characterized by maximum efficiency, a high flexibility and a short return on investment. Thanks to an effective clipping system, TREV is an evolving Trunking light on which you can combine easily Efficiency, High Performance or Blind Cover modules into one main rail according to the local needs, minimizing total cost (low energy consumption, mounting and maintenance costs). With TREV, it is possible to mount light lines up to 5,17 meters seamless, with an LED efficacy up to 178lm/W, combining a wide variety of beam angle (narrow/medium/ wide/asymmetrical/double asymmetrical) that allows to change the light distribution according to the needs. The TREV Trunking system made of extruded aluminium has a 5 Year Warranty, is available in suspended or surface mounted version, in ON-OFF or DALI mode, with or without an emergency kit and can be integrated into a Smart Lighting system. You can choose between 4000K or 5000K colour temperature and textured black, anodized aluminium or smooth white finishing colours. TREV is an ideal solution if you are looking for a versatile and quick-mounting Trunking system that fits all the industrial and retail requirements.

APPLICATION	AreasAplicação TEST EN
MOUNTING	Suspension/Surface
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 161 lm/W
IK	IK04
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY



TREV HIGH PERFORMANCE PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80


LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
868	33,3	AL, TB, TW	4000K	DA, NF	5273	4904	169XX.0830.840.FI
868	33,3	AL, TB, TW	4000K	DA, NF	5273	5009	169XX.0860.840.FI
868	33,3	AL, TB, TW	4000K	DA, NF	5273	4957	169XX.0890.840.FI
868	33,3	AL, TB, TW	4000K	DA, NF	5273	5009	169XX.08XXS.840.FI
868	33,3	AL, TB, TW	5000K	DA, NF	5351	4976	169XX.0830.850.FI
868	33,3	AL, TB, TW	5000K	DA, NF	5351	5083	169XX.0860.850.FI
868	33,3	AL, TB, TW	5000K	DA, NF	5351	5030	169XX.0890.850.FI
868	33,3	AL, TB, TW	5000K	DA, NF	5351	5083	169XX.08XXS.850.FI
868	33,30487512	AL, TB, TW	4000K	DA, NF	5273	4957	169XX.08AS.840.FI
868	33,30487512	AL, TB, TW	4000K	DA, NF	5273	5009	169XX.08DAS.840.FI
868	33,30487512	AL, TB, TW	5000K	DA, NF	5351	5030	169XX.08AS.850.FI
868	33,30487512	AL, TB, TW	5000K	DA, NF	5351	5083	169XX.08DAS.850.FI
1732	66,6	AL, TB, TW	4000K	DA, NF	10546	10019	169XX.17XXS.840.FI
1732	66,6	AL, TB, TW	5000K	DA, NF	10701	10166	169XX.17XXS.850.FI
1732	66,60975024	AL, TB, TW	4000K	DA, NF	10546	9808	169XX.1730.840.FI
1732	66,60975024	AL, TB, TW	4000K	DA, NF	10546	10019	169XX.1760.840.FI
1732	66,60975024	AL, TB, TW	4000K	DA, NF	10546	9913	169XX.1790.840.FI
1732	66,60975024	AL, TB, TW	4000K	DA, NF	10546	9913	169XX.17AS.840.FI
1732	66,60975024	AL, TB, TW	4000K	DA, NF	10546	10019	169XX.17DAS.840.FI
1732	66,60975024	AL, TB, TW	5000K	DA, NF	10701	9952	169XX.1730.850.FI
1732	66,60975024	AL, TB, TW	5000K	DA, NF	10701	10166	169XX.1760.850.FI
1732	66,60975024	AL, TB, TW	5000K	DA, NF	10701	10059	169XX.1790.850.FI
1732	66,60975024	AL, TB, TW	5000K	DA, NF	10701	10059	169XX.17AS.850.FI
1732	66,60975024	AL, TB, TW	5000K	DA, NF	10701	10166	169XX.17DAS.850.FI

SELECT YOUR PREFERRED
OPTION


CONTROLTYPE	XX
DALI / PUSH Dim	DA
ON/OFF	NF

COLOR TEMP.	CT
4000K	40
5000K	50






FINISHING	FI
Anodized aluminium	AL
Textured Black	TB
Textured White	TW

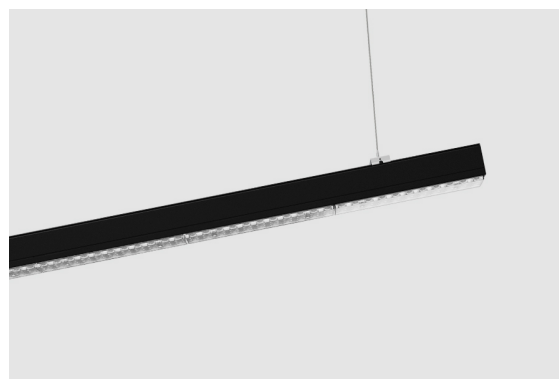

TECHNICAL DRAWING

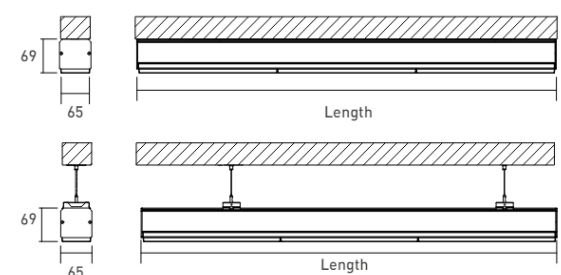

ACCESSORIES

	REVO Power Cable	5 m	3 m	1,5 m
	3x1,5mm ² - 1,5M	30800265	30800261	30800257
	5x1,5mm ² - 1,5M	30800266	30800262	30800258
	7x1,5mm ² - 1,5M	30800267	30800263	30800259
	9x1,5mm ² - 1,5M	30800268	30800264	30800260
	Suspension Kit	Silver		
	Suspension kit 1,5m (1un)	80303017.SL		
	Suspension kit 3 m (1un)	80303018.SL		
	Suspension kit 5 m (1un)	80303019.SL		
	TREV Blind Cover	Textured White	Textured Black	Anodized aluminium
	Blind Cover 868mm	3680868.TW	3680868.TB	3680868.AL
	SEM DescAbr - 3681736.AL	3681736.AL		
	SEM DescAbr - 3681736.TB	3681736.TB		
	SEM DescAbr - 3681736.TW	3681736.TW		
	Revo Wiring	-		
	Revo Wiring 3wr	3WR.10.17		
	Revo Wiring 5wr	5WR.10.17		
	Revo Wiring 7wr	7WR.10.17		
	Revo Wiring 9wr	9WR.10.17		
	Profile Trev 868mm			
	SEM DescAbr - 3660868.AL	3660868.AL		
	SEM DescAbr - 3660868.TB	3660868.TB		
	SEM DescAbr - 3660868.TW	3660868.TW		
	SEM DescAbr - 3661736			
	SEM DescAbr - 3661736.AL	3661736.AL		
	SEM DescAbr - 3661736.TB	3661736.TB		
	SEM DescAbr - 3661736.TW	3661736.TW		
	SEM DescAbr - 3662604			
	SEM DescAbr - 3662604.AL	3662604.AL		
	SEM DescAbr - 3662604.TB	3662604.TB		
	SEM DescAbr - 3662604.TW	3662604.TW		
	SEM DescAbr - 3663472			
	SEM DescAbr - 3663472.AL	3663472.AL		
	SEM DescAbr - 3663472.TB	3663472.TB		
	SEM DescAbr - 3663472.TW	3663472.TW		
	End Caps for TREV	Textured White	Textured Black	Anodized aluminium
	End Caps for TREV	80303061.TW	80303061.TB	80303061.AL
	REVO/TREV Linear Joint	-		
	REVO/TREV Linear Joint	5004-014		
	Mounting Clip	-		
	Mounting Clip	5004-020		
	Emergency kit 150W 1H	-		
	Emergency kit 150W 1H	6080-006		
	Emergency kit 150W 3H	-		
	Emergency kit 150W 3H	6080-007		
	CASAMBI - DALI Interface	CASAMBI		
	CASAMBI - DALI Interface	8030-2590		



PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo

