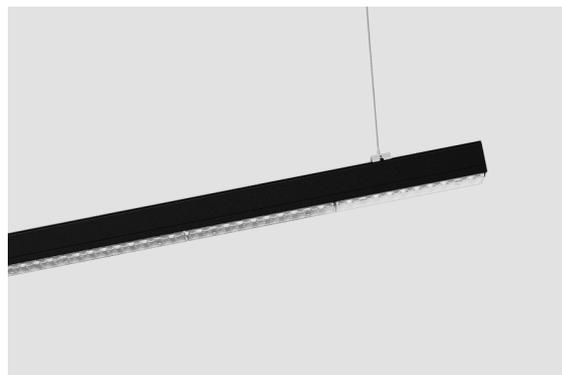


DESCRIPTION

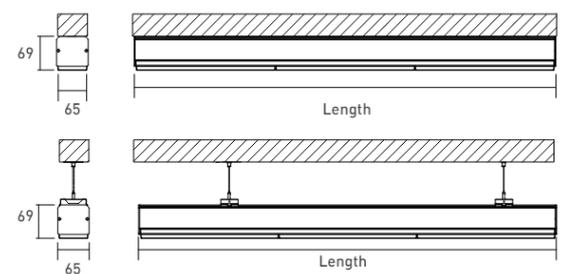
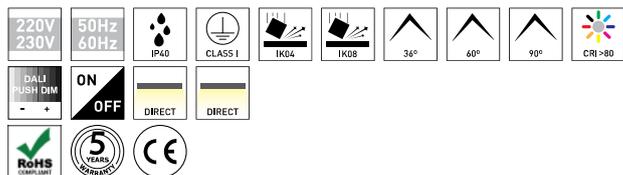
Brilumen presents TREV, a tailor-made LED lighting solution for large retail stores such as hypermarkets, warehousing and industrial environments, which is characterized by maximum efficiency, a high flexibility and a short return on investment. Thanks to an effective clipping system, TREV is an evolving Trunking light on which you can combine easily Efficiency, High Performance or Blind Cover modules into one main rail according to the local needs, minimizing total cost (low energy consumption, mounting and maintenance costs). With TREV, it is possible to mount light lines up to 5,17 meters seamless, with an LED efficacy up to 178lm/W, combining a wide variety of beam angle (narrow/medium/ wide/asymmetrical/double asymmetrical) that allows to change the light distribution according to the needs. The TREV Trunking system made of extruded aluminium has a 5 Year Warranty, is available in suspended or surface mounted version, in ON-OFF or DALI mode, with or without an emergency kit and can be integrated into a Smart Lighting system. You can choose between 4000K or 5000K colour temperature and textured black, anodized aluminium or smooth white finishing colours. TREV is an ideal solution if you are looking for a versatile and quick-mounting Trunking system that fits all the industrial and retail requirements.



APPLICATION	AreasAplicação TEST EN
MOUNTING TYPE	Suspension/Surface
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 178 lm/W
IK	IK04
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

**TREV EFFICIENCY
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3723	168XX.0830.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3803	168XX.0860.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3763	168XX.0890.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3763	168XX.08AS.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3803	168XX.08DAS.840.FI
868	22.8	AL, TB, TW	4000K	DA, NF	4003	3803	168XX.08XXS.840.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3778	168XX.0830.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3859	168XX.0860.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3818	168XX.0890.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3818	168XX.08AS.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3859	168XX.08DAS.850.FI
868	22.8	AL, TB, TW	5000K	DA, NF	4062	3859	168XX.08XXS.850.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7446	168XX.1730.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7606	168XX.1760.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7526	168XX.1790.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7526	168XX.17AS.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7606	168XX.17DAS.840.FI
1732	45.7	AL, TB, TW	4000K	DA, NF	8006	7606	168XX.17XXS.840.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7555	168XX.1730.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7718	168XX.1760.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7637	168XX.1790.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7637	168XX.17AS.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7718	168XX.17DAS.850.FI
1732	45.7	AL, TB, TW	5000K	DA, NF	8124	7718	168XX.17XXS.850.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE	XX
DALI / Switch Dim	DA
ON/OFF	NF

COLOR TEMP.	CT
4000K	40
5000K	50

FINISHING	FI
Anodized aluminium	AL
Textured Black	TB
Textured White	TW

ACCESSORIES

	REVO Power Cable	5 m	3 m	1,5 m
	3x1,5mm ² - 1,5M	30800265	30800261	30800257
	5x1,5mm ² - 1,5M	30800266	30800262	30800258
	7x1,5mm ² - 1,5M	30800267	30800263	30800259
	9x1,5mm ² - 1,5M	30800268	30800264	30800260
	Suspension Kit	Silver		
	Suspension kit 1,5m (1un)	80303017.SL		
	Suspension kit 3 m (1un)	80303018.SL		
	Suspension kit 5 m (1un)	80303019.SL		
	TREV Blind Cover	Textured White	Textured Black	Anodized aluminium
	Blind Cover 868mm	3680868.TW	3680868.TB	3680868.AL
	SEM DescAbr - 3681736.AL	3681736.AL		
	SEM DescAbr - 3681736.TB	3681736.TB		
	SEM DescAbr - 3681736.TW	3681736.TW		
	Revo Wiring	.		
	Revo Wiring 3wr	3WR.10.17		
	Revo Wiring 5wr	5WR.10.17		
	Revo Wiring 7wr	7WR.10.17		
	Revo Wiring 9wr	9WR.10.17		
	End Caps for TREV	Textured White	Textured Black	Anodized aluminium
	End Caps for TREV	80303061.TW	80303061.TB	80303061.AL
	REVO/TREV Linear Joint	.		
	REVO/TREV Linear Joint	5004-014		
	Mounting Clip	.		
	Mounting Clip	5004-020		
	Emergency kit 150W 1H	.		
	Emergency kit 150W 1H	6080-006		
	Emergency kit 150W 3H	.		
	Emergency kit 150W 3H	6080-007		
	CASAMBI - DALI Interface	CASAMBI		
	CASAMBI - DALI Interface	8030-2590		

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo

