

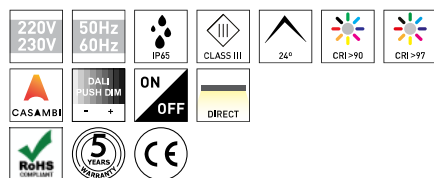
DESCRIPTION

TYR - IP65 downlight for technical and demanding environments.
 The TYR is a downlight designed for environments where IP65 protection is essential, ensuring total protection against dust and water resistance.
 It is the ideal choice for areas such as sanitary facilities, changing rooms, technical areas, industrial kitchens or covered outdoor access points.

MOUNTING TYPE	Encastrar
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 97 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING
ICONOGRAPHY


TYR 11W - IP65
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	11.4	TW	CS, DA, NF	24, 55	1637	1391	2700K	133XX.24.927.FI
100	11.4	TW	CS, DA, NF	24, 55	1637	1391	2700K	133XX.55.927.FI
100	11.4	TW	CS, DA, NF	24, 55	1671	1420	3000K	133XX.24.930.FI
100	11.4	TW	CS, DA, NF	24, 55	1671	1420	3000K	133XX.55.930.FI
100	11.4	TW	CS, DA, NF	24, 55	1785	1518	4000K	133XX.24.940.FI
100	11.4	TW	CS, DA, NF	24, 55	1785	1518	4000K	133XX.55.940.FI

SELECT YOUR PREFERRED
 OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			55°	55
ON/OFF	NF				

TYR 11W - IP65
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	12.8	TW	CS, DA, NF	24, 55	1243	1056	2700K	133XX.24.9727.FI
100	12.8	TW	CS, DA, NF	24, 55	1243	1056	2700K	133XX.55.9727.FI
100	12.8	TW	CS, DA, NF	24, 55	1319	1122	3000K	133XX.24.9730.FI
100	12.8	TW	CS, DA, NF	24, 55	1319	1122	3000K	133XX.55.9730.FI
100	12.8	TW	CS, DA, NF	24, 55	1396	1187	4000K	133XX.24.9740.FI
100	12.8	TW	CS, DA, NF	24, 55	1396	1187	4000K	133XX.55.9740.FI

SELECT YOUR PREFERRED
 OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			55°	55
ON/OFF	NF				