

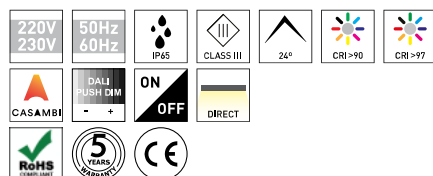
DESCRIPTION

TYR - IP65 downlight for technical and demanding environments.
 The TYR is a downlight designed for environments where IP65 protection is essential, ensuring total protection against dust and water resistance.
 It is the ideal choice for areas such as sanitary facilities, changing rooms, technical areas, industrial kitchens or covered outdoor access points.

MOUNTING TYPE	Encastrar
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 154 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING
ICONOGRAPHY

TYR 13W - IP65
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
136	13.4	TW	CS, DA, NF	24, 55	1863	1583	2700K	124XX.24.927.FI
136	13.4	TW	CS, DA, NF	24, 55	1863	1583	2700K	124XX.55.927.FI
136	13.4	TW	CS, DA, NF	24, 55	1916	1629	3000K	124XX.24.930.FI
136	13.4	TW	CS, DA, NF	24, 55	1916	1629	3000K	124XX.55.930.FI
136	13.4	TW	CS, DA, NF	24, 55	2064	1754	4000K	124XX.24.940.FI
136	13.4	TW	CS, DA, NF	24, 55	2064	1754	4000K	124XX.55.940.FI

 SELECT YOUR PREFERRED
 OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			55°	55
ON/OFF	NF				

TYR 13W - IP65
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
136	13.7	TW	CS, DA, NF	24, 55	1505	1279	2700K	124XX.24.9727.FI
136	13.7	TW	CS, DA, NF	24, 55	1505	1279	2700K	124XX.55.9727.FI
136	13.7	TW	CS, DA, NF	24, 55	1601	1360	3000K	124XX.24.9730.FI
136	13.7	TW	CS, DA, NF	24, 55	1601	1360	3000K	124XX.55.9730.FI
136	13.7	TW	CS, DA, NF	24, 55	1696	1442	4000K	124XX.24.9740.FI
136	13.7	TW	CS, DA, NF	24, 55	1696	1442	4000K	124XX.55.9740.FI

 SELECT YOUR PREFERRED
 OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / Switch Dim	DA			55°	55
ON/OFF	NF				